

MPX³ CTX³ RTX³

UNCOMPROMISING
PERFORMANCE
FOR MOTOR
PROTECTION
AND CONTROL



CATALOGUE
PAGES
→ INSIDE

THE GLOBAL SPECIALIST
IN ELECTRICAL AND DIGITAL BUILDING INFRASTRUCTURES

 **legrand**[®]



MPX³ CTX³ RTX³ A SENSE OF FAMILY

There are requirements for control and protection of motors in all sectors: heating, ventilation and air conditioning in commercial buildings; pumps, compressors, conveyors and machines in industrial buildings, etc. Legrand's new motor circuit breakers, contactors and thermal relays provide a response for all these applications. Their high performance levels, perfect complementarity, compact size, ease of mounting, wide range of auxiliaries, etc. make them suitable for installation in all distribution boards and control enclosures.



INDEX

2	A COMPLETE RANGE OF DEVICES FOR THE PROTECTION AND CONTROL OF MOTORS
4	MPX ³ : MAXIMUM EFFICIENCY IN A COMPACT UNIT
6	AUXILIARIES AND ACCESSORIES PROVIDING FLEXIBILITY
8	CTX ³ : CONTROL OF CIRCUITS
10	CTX ³ MINI: AN ULTRA-COMPACT SOLUTION
12	RTX ³ : THERMAL PROTECTION OF MOTORS
14	ACCESSORIES FOR ALL APPLICATIONS
16	CATALOGUE PAGES

A COMPLETE RANGE OF DEVICES FOR THE PROTECTION AND CONTROL OF MOTORS



MPX³ MOTOR PROTECTION CIRCUIT BREAKERS UP TO 100 A

- High breaking capacity and type 2 coordination for an optimum service level
- Trip class 10
- Sensitive to phase loss
- Compact
- Can be fixed on 35 mm DIN rail or using screws
- Easy combination with CTX³ 3-pole contactors
- Complete range of control and signalling auxiliaries and accessories

STANDARD
BREAKING
CAPACITY

HIGH BREAKING CAPACITY

MAGNETIC ONLY



MPX³ 32S
0.16 A - 100 kA
to 32 A - 15 kA



MPX³ 32H
0.16 A - 100 kA
to 32 A - 50 kA



MPX³ 63H
10 A - 100 kA
to 63 A - 50 kA



MPX³ 100H
17 A - 100 kA
to 100 A - 75 kA



MPX³ 32MA
0.16 A - 100 kA
to 32 A - 50 kA



CTX³ CONTACTORS AND RTX³ THERMAL RELAYS UP TO 800 A

- Compact
- High mechanical and electrical endurance for maximum reliability
- 3-pole and 4-pole contactors
- Screw terminals or cage terminals
- Complete range of auxiliaries and accessories
- Standard and differential version thermal relays

3-POLE CTX³ CONTACTORS

4-POLE CTX³ CONTACTORS

CTX³ mini
6/9/12/16 A

CTX³ 22
9/12/18/22 A

CTX³ 40
32/40 A

CTX³ 65
50/65 A

CTX³ 100
75/85/100 A

CTX³ 150
130/150 A

CTX³ 225
185/225 A

CTX³ 400
265/330/400 A

CTX³ 800
500/630/800 A

CTX³
20 to 900 A

RTX³ thermal relays

RTX³ mini

RTX³ 40

RTX³ 65

RTX³ 100

RTX³ 150

RTX³ 225

RTX³ 400

RTX³ 800

MPX³: MAXIMUM EFFICIENCY IN A COMPACT UNIT

With just 4 sizes of unit, the MPX³ range of circuit breakers offers uncompromising performance levels and functions for the protection of motors up to 100 A.



- 1 IP 2X terminals  MPX³ 32 screw  MPX³ 63/100 cage
- 2 Front and side mounting of auxiliary contacts
- 3 Mount on  rail
- 4 Wide current adjustment range
- 5 Settings protected by a sealable transparent cover (optional) 
- 6 Test function
- 7 Handle can be padlocked in OFF position 
- 8 Label-holder



Certification

- EC declaration of conformity
- UL listed
- EAC



IEC 60947, UL 508
UL 508 Type E, K 60947, GB 14048

**A COMPLETE RANGE
UP TO 100 A IN 4 SIZES**



> 45 mm <
MPX³ 32S



> 45 mm <
MPX³ 32H/MA




> 55 mm <
MPX³ 63H




> 70 mm <
MPX³ 100H

**BREAKING CAPACITIES ICU
AT 415 V~**


MPX³ 32S

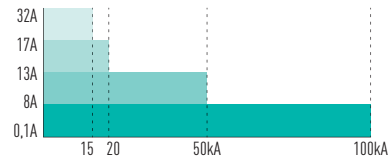

MPX³ 32H/MA




MPX³ 63H



MPX³ 100H



**PERFECT COMPLEMENTARITY
WITH CTX³ CONTACTORS**

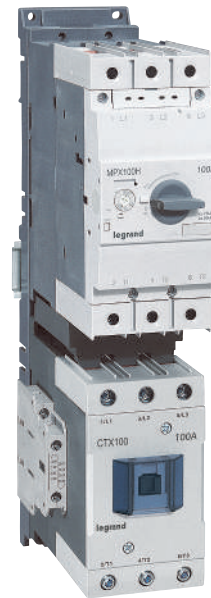

Using the dedicated accessories, MPX³ motor circuit breakers and CTX³ contactors can be joined together directly to create compact motor starters.

AUXILIARIES AND ACCESSORIES PROVIDING FLEXIBILITY

Whatever the specifications of your installation, you will always find a solution from the wide range of dedicated auxiliaries and accessories for MPX³ circuit breakers.



ELECTRICAL AUXILIARIES COMMON TO ALL SIZES OF MPX³

- ① Front-mounting auxiliary contacts



- ② Side-mounting auxiliary contacts and fault signal contacts

- ③ Side-mounting shunt trips and undervoltage releases




Possible combinations of auxiliaries

AUXILIARIES			MPX ³ 32S		MPX ³ 32H/MA		MPX ³ 63H		MPX ³ 100H		
AUXILIARY CONTACTS	FRONT-MOUNTING	MAX. NO.	0	1 or	0	1 or	0	1 or	1	0 or	1
	SIDE-MOUNTING	MAX. NO.	2	1	2	1	2	1	0	2	1
FAULT SIGNAL CONTACT		MAX. NO.	0	1	0	1	0	1 ⁽¹⁾	1 ⁽²⁾	0	1 ⁽²⁾
SHUNT TRIP OR UNDERVOLTAGE RELEASE		MAX. NO.	1	1	1	1	1	1	1	1	1

⁽¹⁾: Cat. No. 4 174 07 - ⁽²⁾: Cat. No. 4 174 08

A COMPLETE RANGE OF DEDICATED ACCESSORIES FOR EASIER INSTALLATION


Supply busbars and terminals for connecting the circuit breakers in parallel.

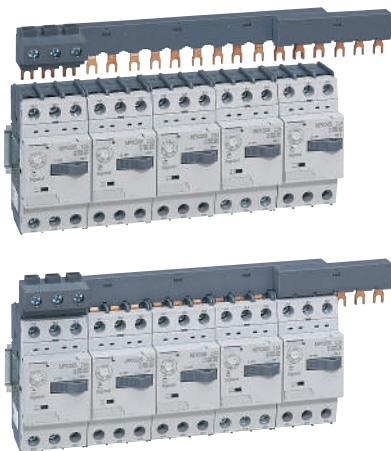

Remote rotary control for mounting on door and IP65 unit with black or yellow and red rotary handle.



Plates and connectors for creating motor starters.

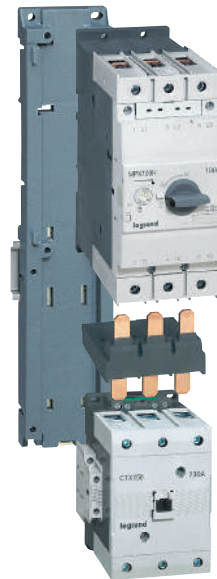


CTX³: CONTROL OF CIRCUITS UP TO 800⁽¹⁾ A

With a comprehensive selection of ratings, control voltages, auxiliaries and accessories, and total complementarity with MPX³ circuit breakers and RTX³ thermal relays, CTX³ power contactors provide an ideal solution for motor switching and controlling circuits for the most demanding applications.

⁽¹⁾ 900 A for 4P contactors

CTX³ 225/400/800: MOUNTING ON PLATE UP TO 800 A

- 1 Connection plates for bars or lugs
- 2 Pre-mounted auxiliary contact blocks (2 per contactor). Additional auxiliary contact blocks can be mounted on the right or left of the contactors.

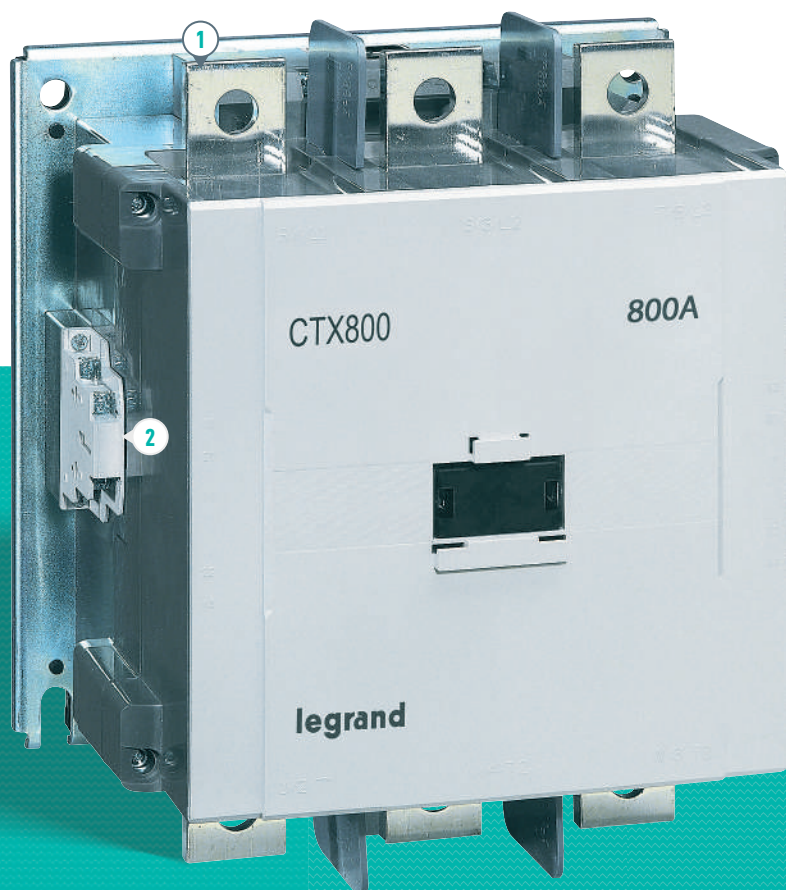




The 4-pole version of CTX³ contactors is available from 20 to 900 A (AC-1).

CTX³ 22/40/65/100/150: MOUNTING ON DIN RAIL OR ON PLATE UP TO 150 A


- 3 IP 2X terminals: screw terminals up to 40 A, screw or cage terminals from 50 to 150 A
- 4 Integrated auxiliary contacts
- 5 A1 and A2 supply terminal block (top and bottom)



Common time-delay modules and auxiliary contact blocks for all CTX³ up to 150 A.

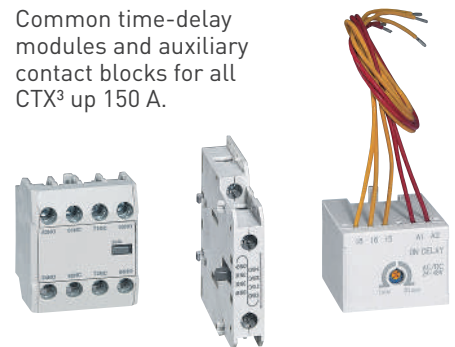

CTX³ contactors can be fitted with a safety cover.



CTX³ MINI: AN ULTRA-COMPACT SOLUTION UP TO 16 A

With their compact size, CTX³ MINI are easy to integrate in control panels or distribution boards for switching motors, lighting and heating circuits up to 16 A.



CTX³ MINI: MOUNTING ON DIN RAIL OR ON PLATE


- ① IP 2X screw terminals
- ② Integrated auxiliary contact (3P only)
- ③ A1 and A2 supply terminal block



The flexible wire kits allow to associate freely two CTX³ mini 3-pole contactors and make very compact assemblies for motor reversing. For motors up to 7.5 kW 415 V.

AUXILIARIES AND ACCESSORIES FOR EVEN MORE APPLICATIONS

CTX³ mini contactors can take front and side-mounting additional auxiliary contact blocks and a mechanical interlock module.




CTX³ control relays take the same auxiliaries as the CTX³ mini.



Plate and connector for joining a CTX³ mini and an MPX³ 32 motor circuit breaker together directly to create a compact motor starter.

RTX³: THERMAL PROTECTION OF MOTORS

RTX³ thermal relays provide protection against overloads, long starting times and prolonged stalling of the motor. The differential technology provides increased protection in the event of the failure of one phase. They are very easy to install, connecting directly beneath CTX³ contactors.

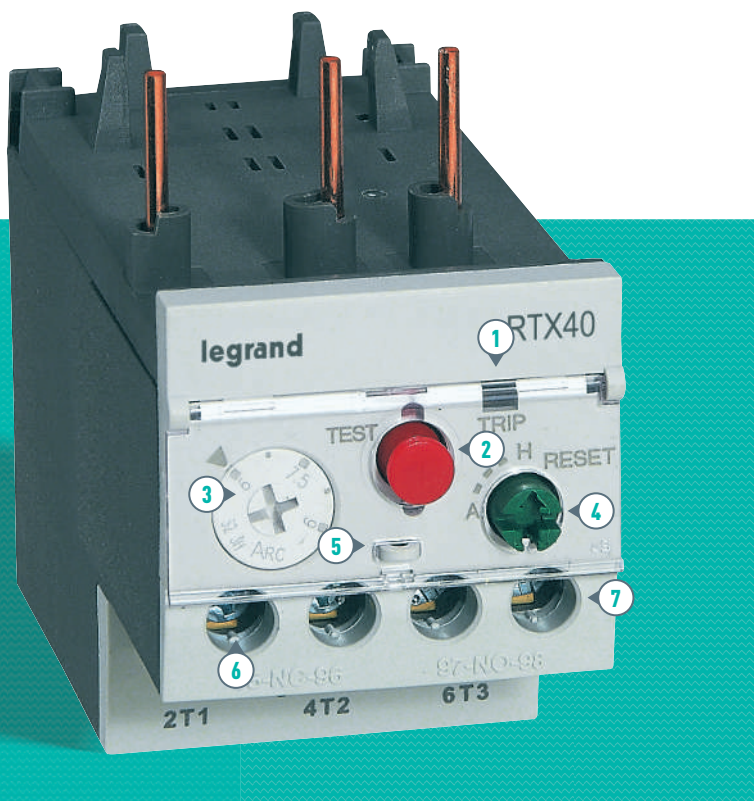

- 1 Trip indicator
- 2 Off/test button
- 3 Adjustment of the trip threshold of the thermal protection
- 4 Reset button and mode selector switch: automatic (A)/manual (H)
- 5 Sealable protective cover
- 6 Integrated auxiliary contacts (1 NO + 1 NC)
- 7 IP20 terminals




COMPACT MOTOR STARTERS



Mounting directly beneath contactors or separately (up 150 A) with the dedicated accessory.

A COMPLETE RANGE

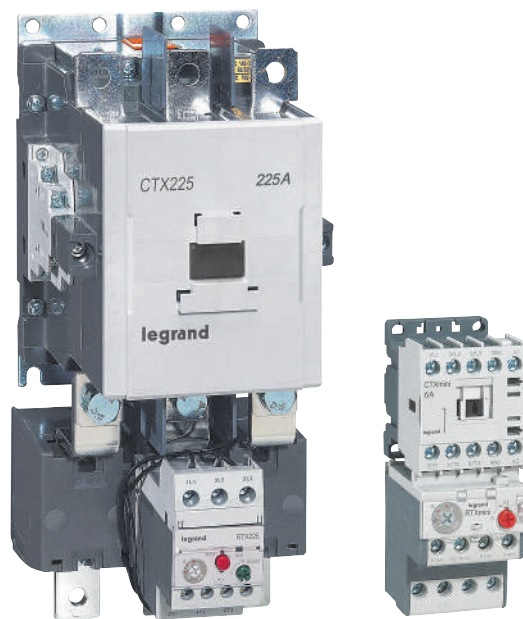


RTX³ thermal relays can be used to create 0.1 A to 800 A motor starters when combined with contactors, from the CTX³ mini to the CTX³ 800.

ACCESSORIES FOR ALL APPLICATIONS

With the wide range of accessories, CTX³ contactors can be used in a wide variety of applications:


- Switching capacitor banks
- Supply inverter
- Reversing contactor
- Time-delay motor starter
- Control unit on machine, etc.

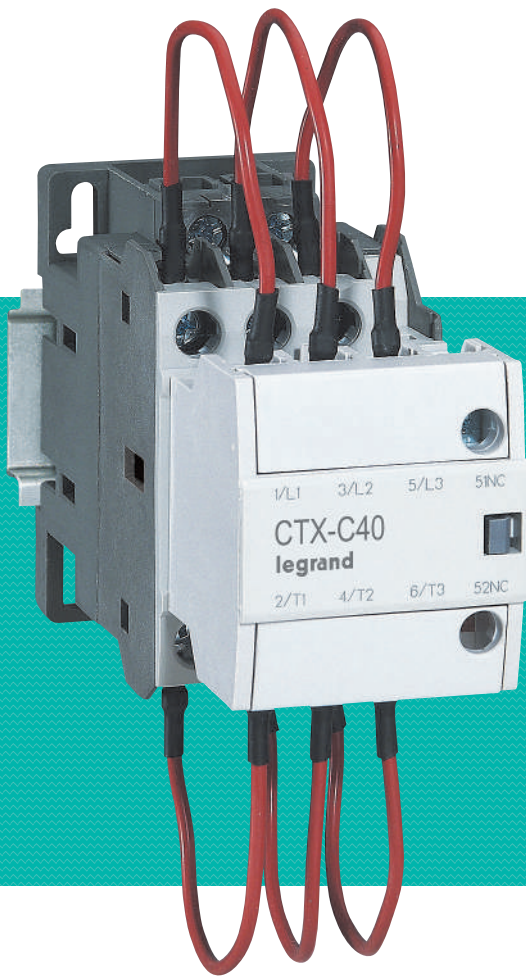

FRONT-MOUNTING BLOCK FOR SWITCHING CAPACITORS

Auxiliary blocks for switching capacitors are installed directly on CTX³ 3-pole, 9 to 100 A contactors. With their discharge resistors, they reduce current peaks during switching of capacitor banks.



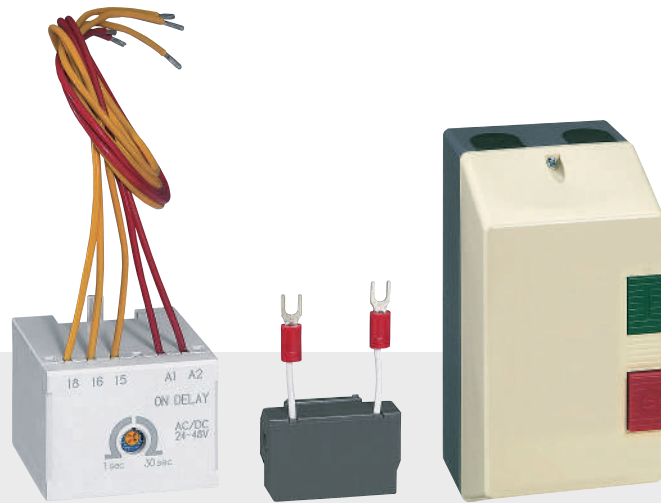


Time-delay modules, interference suppression module, motor starter units, etc., a complete range of accessories for all requirements.

MECHANICAL AND ELECTRICAL INTERLOCKING FOR 3 AND 4-POLE CONTACTORS



The mechanical interlock devices, with or without electrical interlocking, can be used to create 9 to 800 A inverters for 3P contactors, and 20 to 900 A inverters for 3P contactors.



The connection kits make it very easy to create reversing contactors up to 100 A.

MPCBs MPX³

technical characteristics

MPCB		MPX ³ 32S										MPX ³ 32H											
	Size	1										2											
	Type	Thermal magnetic										Thermal magnetic											
	Breaking capacity	Standard										High											
	Handle type	Toggle										Rotary											
	Number of poles	3										3											
Characteristics of use																							
Rated operational voltage (Ue)		Up to 690 V										Up to 690 V											
Rated frequency		50/60 Hz										50/60 Hz											
Rated insulation voltage (Ui)		690 V										690 V											
Rated impulse voltage (Uimp)		6 kV										6 kV											
Utilisation category	IEC 60947-2 (breaker)	Cat. A										Cat. A											
	IEC 60947-4 (Motor starter)	AC3										AC3											
Mechanical endurance (Operating)		100000										100000											
Electric endurance (Cycles)		100000										100000											
Max operating frequency per hour (Ope./h)		25										25											
Temperature compensation		-20 to +60 °C										-20 to +60 °C											
Instantaneous short circuit release		13 x Ie max.										13 x Ie max.											
Trip class		10										10											
Overload protection		•										•											
Phase failure protection		•										•											
Trip indicating function		with alarm contact 4 174 06/07										with alarm contact 4 174 06/07											
Test function		•										•											
Weight (g)		320										360											
Rated breaking capacity (kA)	Rated operational current Ie (A)	Thermal release adjustment range (A)	240 V 230 V 220 V		415 V 400 V		460 V 440 V		525 V 500 V		690 V 600 V		240 V 230 V 220 V		415 V 400 V		460 V 440 V		525 V 500 V		690 V 600 V		
			Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	
0.16	0.1 to 0.16	0.1 to 0.16	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
0.25	0.16 to 0.25	0.16 to 0.25	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
0.4	0.25 to 0.4	0.25 to 0.4	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
0.63	0.4 to 0.63	0.4 to 0.63	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
1	0.63 to 1	0.63 to 1	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	
1.6	1 to 1.6	1 to 1.6	100	100	100	100	100	100	100	100	3	3	100	100	100	100	100	100	100	100	100	100	
2.5	1.6 to 2.5	1.6 to 2.5	100	100	100	100	100	100	50	38	3	3	100	100	100	100	100	100	100	100	8	8	
4	2.5 to 4	2.5 to 4	100	100	100	100	50	38	15	11	3	3	100	100	100	100	100	100	100	100	8	8	
6	4 to 6	4 to 6	100	100	100	100	15	11	10	8	3	3	100	100	100	100	100	100	100	100	6	6	
8	5 to 8	5 to 8	100	100	100	100	15	11	10	8	3	3	100	100	100	100	50	38	50	38	6	6	
10	6 to 10	6 to 10	100	100	50	38	15	11	6	5	3	3	100	100	100	100	50	38	50	38	6	6	
13	9 to 13	9 to 13	100	100	50	38	10	8	6	5	3	3	100	100	100	100	50	38	42	32	6	6	
17	11 to 17	11 to 17	50	38	20	15	10	8	6	5	3	3	100	100	50	38	20	15	10	8	4	4	
22	14 to 22	14 to 22	40	30	15	11	8	6	6	5	3	3	100	100	50	38	20	15	10	8	4	4	
26	18 to 26	18 to 26	40	30	15	11	8	6	5	4	3	3	100	100	50	38	20	15	10	8	4	4	
32	22 to 32	22 to 32	30	22	15	11	6	4	5	4	3	3	100	100	50	38	20	15	10	8	4	4	
40	28 to 40		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
50	34 to 50		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
63	45 to 63		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
75	55 to 75		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
90	70 to 90		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
100	80 to 100		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	



MPX³ 32MA

MPX³ 63H

MPX³ 100H

2

3

4

Magnetic only

Thermal magnetic

Thermal magnetic

High

High

High

Rotary

Rotary

Rotary

3

3

3

Up to 690 V

Up to 690 V

Up to 690 V

50/60 Hz

50/60 Hz

50/60 Hz

690 V

1000 V

1000 V

6 kV

8 kV

8 kV

Cat. A

Cat. A

Cat. A

AC3

AC3

AC3

100000

50000

50000

100000

25000

25000

25

25

25

-20 to +60 °C

-20 to +60 °C

-20 to +60 °C

13 x le max.

13 x le max.

13 x le max.

0

10

10

-

•

•

-

•

•

with alarm contact 4 174 06/07

with alarm contact 4 174 07/08

with alarm contact 4 174 07/08

•

•

•

360

1000

2200

240 V 230 V 220 V		415 V 400 V		460 V 440 V		525 V 500 V		690 V 600 V		240 V 230 V 220 V		415 V 400 V		460 V 440 V		525 V 500 V		690 V 600 V		240 V 230 V 220 V		415 V 400 V		460 V 440 V		525 V 500 V		690 V 600 V	
Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics	Icu	Ics
100	100	100	100	100	100	100	100	100	100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	100	100	100	100	100	100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	100	100	100	100	100	100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	100	100	100	100	100	100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	100	100	100	100	100	100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	100	100	100	100	100	100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	100	100	100	100	8	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	100	100	100	100	8	8	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	100	100	100	100	6	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	50	38	50	38	6	6	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
100	100	100	100	50	38	50	38	6	6	100	100	100	100	50	38	50	38	6	5	-	-	-	-	-	-	-	-	-	-
100	100	100	100	50	38	42	32	6	6	100	100	100	100	50	38	42	32	6	5	-	-	-	-	-	-	-	-	-	-
100	100	50	38	20	15	10	8	4	4	100	100	50	50	50	38	12	9	5	5	100	100	100	100	50	38	35	27	12	9
100	100	50	38	20	15	10	8	4	4	100	100	50	50	50	38	12	9	5	5	100	100	100	50	50	38	35	27	12	9
100	100	50	38	20	15	10	8	4	4	100	100	50	50	35	27	12	9	5	5	100	100	100	50	50	38	35	27	12	9
100	100	50	38	20	15	10	8	4	4	100	100	50	50	35	27	10	8	5	5	100	100	100	50	50	38	25	19	12	9
-	-	-	-	-	-	-	-	-	-	100	100	50	50	35	27	10	8	5	5	100	100	100	50	50	38	20	15	12	9
-	-	-	-	-	-	-	-	-	-	100	100	50	50	35	27	10	8	5	5	100	100	100	50	50	38	15	11	10	8
-	-	-	-	-	-	-	-	-	-	100	100	50	50	35	27	10	8	5	5	100	100	100	50	50	38	15	11	8	6
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100	100	75	50	50	38	12	9	6	6
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100	100	75	50	50	38	12	9	6	6
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	100	100	75	50	50	38	12	9	6	6

MPCBs MPX³

motor protection circuit breakers from 0.16 A to 100 A



4 173 08

4 173 68

4 173 79

4 173 48

Technical characteristics and tripping curves **p. 20-23**
 Dimensions and wiring capacity chart **p. 24-27**


Conform to IEC 60947-1, IEC 60947-2, IEC 60947-4

Pack	Cat. Nos	Thermal magnetic MPCBs			
		Adjustable thermal release Magnetic release 13 le max.			
		MPX³ 32S			
		Standard breaking capacity With toggle handle Fixing on rail			
		3-phase motor 400/415 V (kW)	Thermal release adjustment range (A)	Magnetic release operating current (A)	415 V breaking capacity Icu (kA)
	3P				
1	4 173 00	0.02	0.1 to 0.16	2.1	100
1	4 173 01	0.06	0.16 to 0.25	3.3	100
1	4 173 02	0.09	0.25 to 0.4	5.2	100
1	4 173 03	0.12	0.4 to 0.63	8.2	100
1	4 173 04	0.18/0.25	0.63 to 1	13	100
1	4 173 05	0.37/0.55	1 to 1.6	20.8	100
1	4 173 06	0.75	1.6 to 2.5	32.5	100
1	4 173 07	1.5	2.5 to 4	52	100
1	4 173 08	2.2	4 to 6	78	100
1	4 173 09	3	5 to 8	104	100
1	4 173 10	4	6 to 10	130	50
1	4 173 11	5.5	9 to 13	169	50
1	4 173 12	7.5	11 to 17	221	20
1	4 173 13	7.5	14 to 22	286	15
1	4 173 14	11	18 to 26	338	15
1	4 173 15	15	22 to 32	416	15
		MPX³ 32H			
		High breaking capacity With rotary handle Fixing on rail			
1	4 173 20	0.02	0.1 to 0.16	2.1	100
1	4 173 21	0.06	0.16 to 0.25	3.3	100
1	4 173 22	0.09	0.25 to 0.4	5.2	100
1	4 173 23	0.12	0.4 to 0.63	8.2	100
1	4 173 24	0.18/0.25	0.63 to 1	13	100
1	4 173 25	0.37/0.55	1 to 1.6	20.8	100
1	4 173 26	0.75	1.6 to 2.5	32.5	100
1	4 173 27	1.5	2.5 to 4	52	100
1	4 173 28	2.2	4 to 6	78	100
1	4 173 29	3	5 to 8	104	100
1	4 173 30	4	6 to 10	130	100
1	4 173 31	5.5	9 to 13	169	100
1	4 173 32	7.5	11 to 17	221	50
1	4 173 33	7.5	14 to 22	286	50
1	4 173 34	11	18 to 26	338	50
1	4 173 35	15	22 to 32	416	50
		MPX³ 63H			
		High breaking capacity With rotary handle Fixing on rail or by screw			
1	4 173 60	4	6 to 10	130	100
1	4 173 61	5.5	9 to 13	169	100
1	4 173 62	7.5	11 to 17	221	50
1	4 173 63	7.5	14 to 22	286	50
1	4 173 64	11	18 to 26	338	50
1	4 173 65	15	22 to 32	416	50
1	4 173 66	18.5	28 to 40	520	50
1	4 173 67	22	34 to 50	650	50
1	4 173 68	30	45 to 63	819	50

Pack	Cat. Nos	Thermal magnetic MPCBs (continued)			
		MPX³ 100H			
		High breaking capacity With rotary handle Fixing on rail or by screw			
		3-phase motor 400/415 V (kW)	Thermal release adjustment range (A)	Magnetic release operating current (A)	415 V breaking capacity Icu (kA)
	3P				
1	4 173 70	7.5	11 to 17	221	100
1	4 173 71	7.5	14 to 22	286	100
1	4 173 72	11	18 to 26	338	100
1	4 173 73	15	22 to 32	416	100
1	4 173 74	18.5	28 to 40	520	100
1	4 173 75	22	34 to 50	650	100
1	4 173 76	30	45 to 63	819	100
1	4 173 77	37	55 to 75	975	75
1	4 173 78	45	70 to 90	1170	75
1	4 173 79	45	80 to 100	1300	75
		Magnetic only MPCBs			
		Without thermal release Magnetic release 13 x le max.			
		MPX³ 32MA			
		High breaking capacity With rotary handle Fixing on rail			
		3-phase motor 400/415 V (kW)	Magnetic release operating current (A)	415 V breaking capacity Icu (kA)	
	3P				
1	4 173 40	0.02	2.1	100	
1	4 173 41	0.06	3.3	100	
1	4 173 42	0.09	5.2	100	
1	4 173 43	0.12	8.2	100	
1	4 173 44	0.18/0.25	13	100	
1	4 173 45	0.37/0.55	20.8	100	
1	4 173 46	0.75	32.5	100	
1	4 173 47	1.5	52	100	
1	4 173 48	2.2	78	100	
1	4 173 49	3	104	100	
1	4 173 50	4	130	100	
1	4 173 51	5.5	169	100	
1	4 173 52	7.5	221	50	
1	4 173 53	7.5	286	50	
1	4 173 54	11	338	50	
1	4 173 55	15	416	50	

MPCBs MPX³

accessories

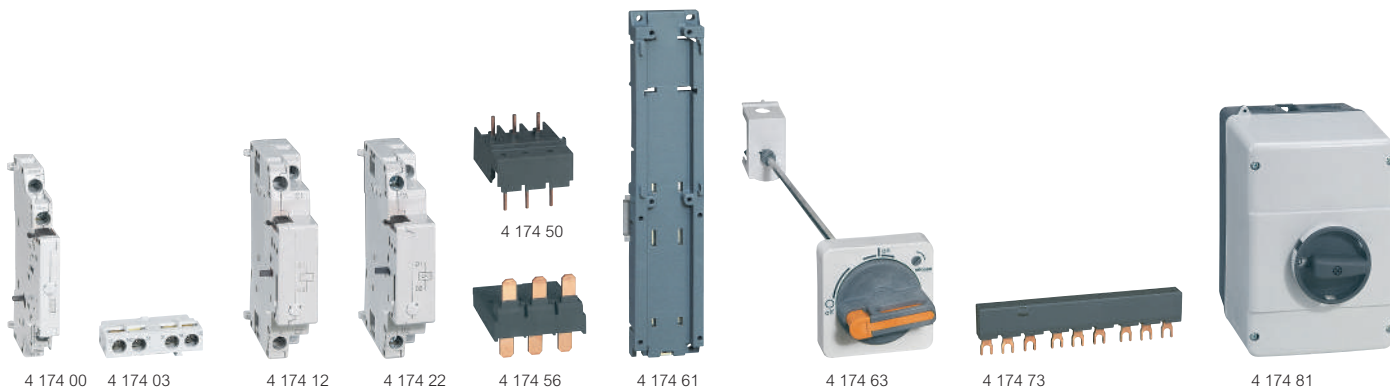

Pack	Cat. Nos	Accessories
		Auxiliary contacts
		2-pole
		Side mounting
		Mounting on the left side of MPCBs
		Two auxiliary contacts per MPCB
2	4 174 00	1 NO + 1 NC
2	4 174 01	2 NO
2	4 174 02	2 NC
		Front mounting
		One auxiliary contact per MPCB
10	4 174 03	1 NO + 1 NC
10	4 174 04	2 NO
10	4 174 05	2 NC
		Alarm contacts
		1 NO + 1 NC
		Any trip alarm contact
		Operate in case of trip
		Mounting on the left side of MPCBs
		Set alarm contact first in case of using auxiliary contact together (MPX ³ 63H can not accept auxiliary contact and alarm contact together)
1	4 174 06	For MPX ³ 32
1	4 174 08	For MPX ³ 63 and 100
		Magnetic trip alarm contact
		Operate in case of instantaneous trip
		Mounting on the left side of MPCBs
		Set alarm contact first in case of using auxiliary contact together
2	4 174 07	1 NO + 1 NC
		Shunt release
		Mounting on the right side of MPCBs
		One release per MPCB
1	4 174 10	24 V - 50 Hz / 28 V - 60 Hz
1	4 174 11	110 V - 50 Hz / 120 V - 60 Hz
1	4 174 12	220-230 V - 50 Hz / 240-260 V - 60 Hz
1	4 174 13	380-400 V - 50 Hz / 440-460 V - 60 Hz
		Undervoltage release
		Mounting on the right side of MPCBs
		One release per MPCB
		Without auxiliary contact
1	4 174 20	24 V - 50 Hz / 28 V - 60 Hz
1	4 174 21	110 V - 50 Hz / 120 V - 60 Hz
1	4 174 22	220-230 V - 50 Hz / 240-260 V - 60 Hz
1	4 174 23	380-400 V - 50 Hz / 440-460 V - 60 Hz
		With 2 NO auxiliary contacts
		Can not attach to MPX ³ 32S
1	4 174 30	24 V - 50 Hz / 28 V - 60 Hz
1	4 174 31	110 V - 50 Hz / 120 V - 60 Hz
1	4 174 32	220-230 V - 50 Hz / 240-260 V - 60 Hz
1	4 174 33	380-400 V - 50 Hz / 440-460 V - 60 Hz
		Dial Cover
		Sealable cover to protect the set value from the operation that is not intended
100	4 174 79	For all types of MPX ³
		Direct adaptator and mounting unit
		For mounting CTX ³ contactors under MPX ³ MPCBs
		Direct adaptators
		Used to connect MPX ³ directly with the contactor
2	4 174 40	For MPX ³ 32S with CTX ³ mini AC (p. 30)
2	4 174 41	For MPX ³ 32S with CTX ³ mini DC (p. 30)
2	4 174 42	For MPX ³ 32H/32MA with CTX ³ mini AC (p. 30)
2	4 174 43	For MPX ³ 32H/32MA with CTX ³ mini DC (p. 30)
2	4 174 48	For MPX ³ 32S with CTX ³ 22 AC (p. 32)
2	4 174 49	For MPX ³ 32S with CTX ³ 22 DC (p. 32)
2	4 174 50	For MPX ³ 32H/32MA with CTX ³ 22 AC (p. 32)
2	4 174 51	For MPX ³ 32H/32MA with CTX ³ 22 DC (p. 32)
2	4 174 52	For MPX ³ 32S with CTX ³ 40 AC (p. 32)
2	4 174 53	For MPX ³ 32S with CTX ³ 40 DC (p. 32)
2	4 174 54	For MPX ³ 32H/32MA with CTX ³ 40 AC (p. 32)
2	4 174 55	For MPX ³ 32H/32MA with CTX ³ 40 DC (p. 32)
2	4 174 56	For MPX ³ 63H with CTX ³ 65 AC with lug type terminals (p. 32)
2	4 174 57	For MPX ³ 63H with CTX ³ 65 DC with lug type terminals (p. 32)
1	4 174 58	For MPX ³ 100H with CTX ³ 100 AC with lug type terminals (p. 33)
1	4 174 59	For MPX ³ 100H with CTX ³ 100 DC with lug type terminals (p. 33)
		Mounting unit
		This device is used for joining together MPX ³ MPCBs and CTX ³ contactors
		Screws not supplied
1	4 174 60	For MPX ³ 32S/32H/32MA
1	4 174 61	For MPX ³ 63H
1	4 174 62	For MPX ³ 100H
		Rotary handle
		Mounting on panel's door to control the MPX ³
1	4 174 63	For MPX ³ 32H and 32 MA
1	4 174 64	For MPX ³ 63H
1	4 174 65	For MPX ³ 100H
		Phase busbar
		For parallel connection of MPX ³
		For MPX³ 32S, 32H and 32MA
		Rated current 63 A
10	4 174 71	2 devices
10	4 174 73	3 devices
10	4 174 75	4 devices
10	4 174 76	5 devices
4	4 174 77	Feeder for phase busbar
		For MPX³ 63H
		Rated current 108 A
4	4 174 72	2 devices
4	4 174 74	3 devices
		Enclosures for MPX³ 32H and 32MA
		IP 65 enclosure to use in dusty areas as well as in presence of corrosive gas or liquid
1	4 174 80	Yellow/red with rotary handle
1	4 174 81	With black rotary handle

MPCBs MPX³


wiring capacity and accessories

Mounting

MPX³ 32: 35 mm rail (depth 15 mm)

MPX³ 63: 35 mm rail (depth 15 mm) or screws

MPX³ 100: 35 mm (depth 15 mm) or 75 mm rail or screws

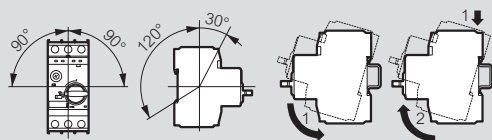

Operating positions

DIN rail mounting

Environment

Ambient air temperature:

- storage: -50...+80 °C

- operation: -20...+60 °C

Ambient temperature compensation: -20...+60 °C

Maximum operating altitude: 2000 m


Protection degree: IP20

Shock resistance: 25 g

Vibration resistance: 5~150 Hz

Caution for thermal adjustments

1. Keep the setting range as shown below
2. Moving counterclockwise out of the setting range may cause the damage of the device



Dial setting method

3. Calibration by ambient air temperature

A: set to one point lower	Calibrated automatically	B: set to one point higher
-20 °C	-5 °C	+40 °C
+60 °C		

In case of using out of the standard air temperature range (-5 °C to +40 °C) it needs to be calibrated by one point

Power consumption

	MPX ³ 32S	MPX ³ 32H/MA	MPX ³ 63H	MPX ³ 100H
Total power loss P _v	In = 0.16 to 1.6 A: 4.4	In = 0.16 to 1.6 A: 4.4	In = 10 to 22 A: 10.2	In = 17 to 32 A : 15
Circuit breaker at rated load operating temperature (W)	In = 2.5 to 26 A : 7.4 In = 32 A : 4.0	In = 2.5 to 26 A : 7.4 In = 32 A : 4.0	In = 26 to 63 A: 9.7	In = 40 to 63 A : 21.8 In = 75 to 100 A: 17.8

MPX³ 32S

Rated operational current I _e (A)	0.16	0.25	0.4	0.63	1	1.6	2.5	4	6	8	10	13	17	22	26	32
Switching of standard three-phase motors AC-2, AC-3																
230/240V (kW)	-	0.03	0.06	0.09	0.12	0.18/0.25	0.37	0.55/0.75	1.1/1.5	1.5	2.2/3	3	3.7/4	4	5.5	7.5
400/415V (kW)	0.02	0.06	0.09	0.12	0.18/0.25	0.37/0.55	0.75	1.1/1.5	2.2	3	3.7/4	5.5	7.5	7.5	11	15
500V (kW)	-	-	-	0.25	0.37	0.55/0.75	1.1	1.5/2.2	3	3.7	4/5.5	7.5	11	11	15	18.5
690V (kW)	-	-	-	0.25	0.37/0.55	0.75/1.1	1.5	2.2/3	3.7/4	5.5	7.5	11	11	15	18.5	22
Back-up fuses gG, gL, only if I_{cc} > I_{cu} (* = no back up fuse required)																
230/240V (A)	*	*	*	*	*	*	*	*	*	*	*	*	*	125	125	125
400/415V (A)	*	*	*	*	*	*	*	*	*	*	80	80	100	100	100	100
440/460V (A)	*	*	*	*	*	*	*	50	50	63	63	80	80	100	100	100
500V (A)	*	*	*	*	*	*	50	40	50	63	63	80	80	80	80	80
690V (A)	*	*	*	*	*	20	35	40	50	63	63	63	63	63	63	63

MPX³ 32H

Rated operational current I _e (A)	0.16	0.25	0.4	0.63	1	1.6	2.5	4	6	8	10	13	17	22	26	32
Switching of standard three-phase motors AC-2, AC-3																
230/240V (kW)	-	0.03	0.06	0.09	0.12	0.18/0.25	0.37	0.55/0.75	1.1/1.5	1.5	2.2/3	3	3.7/4	4	5.5	7.5
400/415V (kW)	0.02	0.06	0.09	0.12	0.18/0.25	0.37/0.55	0.75	1.1/1.5	2.2	3	3.7/4	5.5	7.5	7.5	11	15
500V (kW)	-	-	-	0.25	0.37	0.55/0.75	1.1	1.5/2.2	3	3.7	4/5.5	7.5	11	11	15	18.5
690V (kW)	-	-	-	0.25	0.37/0.55	0.75/1.1	1.5	2.2/3	3.7/4	5.5	7.5	11	11	15	18.5	22
Back-up fuses gG, gL, only if I_{cc} > I_{cu} (* = no back up fuse required)																
230/240V (A)	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
400/415V (A)	*	*	*	*	*	*	*	*	*	*	*	*	100	125	125	125
440/460V (A)	*	*	*	*	*	*	*	*	*	80	80	80	80	100	100	100
500V (A)	*	*	*	*	*	*	*	*	*	63	80	80	80	80	80	80
690V (A)	*	*	*	*	*	*	35	40	50	63	63	63	63	63	63	63

MPX³ 32MA

Rated operational current I _e (A)	0.16	0.25	0.4	0.63	1	1.6	2.5	4	6	8	10	13	17	22	26	32
AC-2, AC-3																
230/240V (kW)	-	0.03	0.06	0.09	0.12	0.18/0.25	0.37	0.55/0.75	1.1/1.5	1.5	2.2/3	3	3.7/4	4	5.5	7.5
400/415V (kW)	0.02	0.06	0.09	0.12	0.18/0.25	0.37/0.55	0.75	1.1/1.5	2.2	3	3.7/4	5.5	7.5	7.5	11	15
500V (kW)	-	-	-	0.25	0.37	0.55/0.75	1.1	1.5/2.2	3	3.7	4/5.5	7.5	11	11	15	18.5
690V (kW)	-	-	-	0.25	0.37/0.55	0.75/1.1	1.5	2.2/3	3.7/4	5.5	7.5	11	11	15	18.5	22
Back-up fuses gG, gL, only if I_{cc} > I_{cu} (* = no back up fuse required)																
230/240V (A)	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*	*
400/415V (A)	*	*	*	*	*	*	*	*	*	*	*	*	100	125	125	125
440/460V (A)	*	*	*	*	*	*	*	*	*	80	80	80	80	100	100	100
500V (A)	*	*	*	*	*	*	*	*	*	63	80	80	80	80	80	80
690V (A)	*	*	*	*	*	*	35	40	50	63	63	63	63	63	63	63

MPX³ 63H

Rated operational current I _e (A)	10	13	17	22	26	32	40	50	63
Switching of standard three-phase motors AC-2, AC-3									
230/240V (kW)	2.2/3	3	3.7/4	4	5.5	7.5	7.5	11	15
400/415V (kW)	3.7/4	5.5	7.5	7.5	11	15	18.5	22	30
500V (kW)	4/5.5	7.5	11	11	15	18.5	22	30	37
690V (kW)	7.5	11	11	15	18.5	22	30	45	55
Back-up fuses gG, gL, only if I_{cc} > I_{cu} (* = no back up fuse required)									
230/240V (A)	*	*	*	*	*	*	*	*	*
400/415V (A)	*	*	100	125	125	125	160	160	160
440/460V (A)	100	100	100	125	125	125	125	125	160
500V (A)	100	100	100	100	100	100	100	100	100
690V (A)	63	63	63	80	80	80	80	80	80

MPX³ 100H


Rated operational current I _e (A)	17	22	26	32	40	50	63	75	90	100
Switching of standard three-phase motors AC-2, AC-3										
230/240V (kW)	3.7/4	4	5.5	7.5	7.5	11	15	22	30	30
400/415V (kW)	7.5	7.5	11	15	18.5	22	30	37	45	45
500V (kW)	11	11	15	18.5	22	30	37	45	55	63
690V (kW)	11	15	18.5	22	30	45	55	63	75	90
Back-up fuses gG, gL, only if I_{cc} > I_{cu} (* = no back up fuse required)										
230/240V (A)	*	*	*	*	*	*	*	*	*	*
400/415V (A)	*	*	*	*	*	*	*	*	*	*
440/460V (A)	125	125	125	160	160	160	200	200	200	200
500V (A)	100	125	125	125	160	160	160	160	160	160
690V (A)	80	80	80	80	80	100	100	125	160	160

Number of auxiliaries per circuit breaker


Auxiliaries	MPX ³ 32S	MPX ³ 32H/MA	MPX ³ 63H	MPX ³ 100H
Auxiliary contact	front mounting	1	1	1
	side mounting	1	1	1
Fault signalling contact	1	1	1	1
Shunt release or undervoltage release	1	1	1	1

Tripping curves

MPX³ 32S / 32H / 32MA

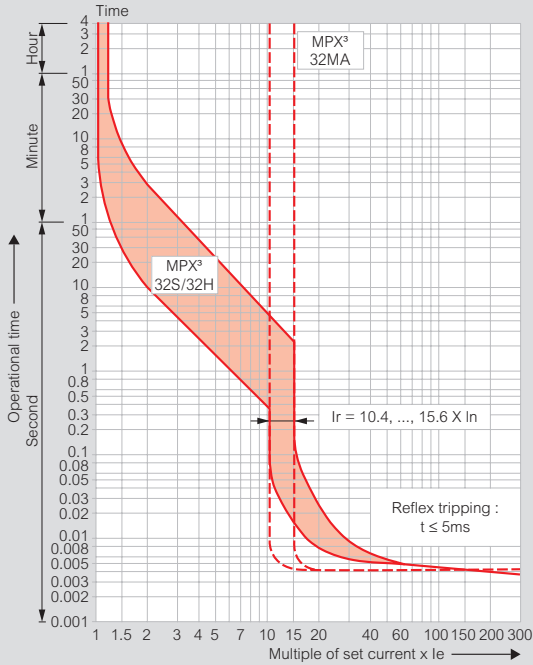

MPX³ 63H / 100H

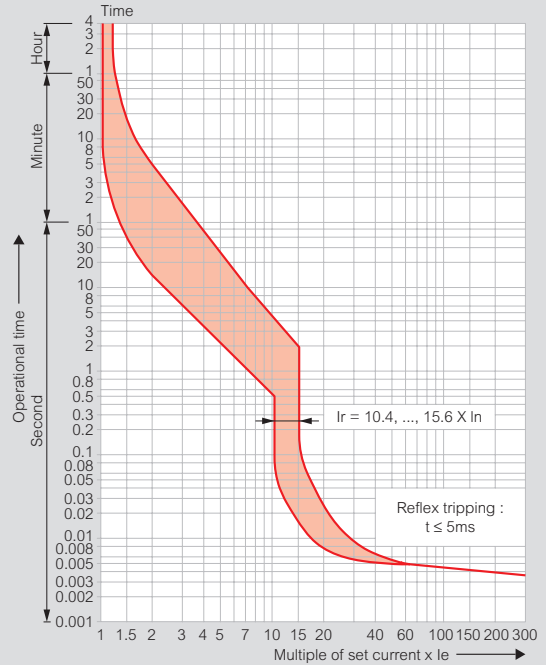

1) Thermal release trip current :

The adjustable inverse bimetal trip reliability protects motors against overloads. The curve shows the mean operating current at an ambient temperature of 20 °C starting from cold. Careful testing and setting ensures effective motor protection even in the case of single-phasing.

2) Current setting Ie :

The overload trip corresponds to a thermal overload relay in a motor starter conforming to IEC 947-4-1. If a different value is prescribed (e.g. reduced Ie for cooling medium having a temperature higher than 40 °C or a place of installation higher than 2000m above sea level), the setting current is equal to the reduced rated current Ie of the motor, as per manufacturer specifications.

When the MCPB is used outside the standard air temperature range (-5°C to +40°C) the thermal release needs to be calibrated by one point: one point lower from -20°C to -5°C and one point higher from +40°C to +60°C.



3) Magnetic release trip current :

The instantaneous magnetic trip has a fixed operating current setting.

This corresponds to 13 times the maximum value of setting range, at a lower setting it is correspondingly higher.



Thermal limit in kA²s in the magnetic operating zone (Ue=415V)

MPX³ 32S

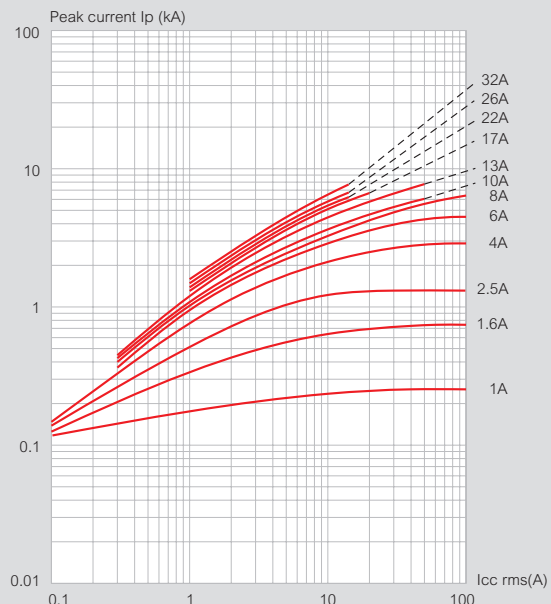
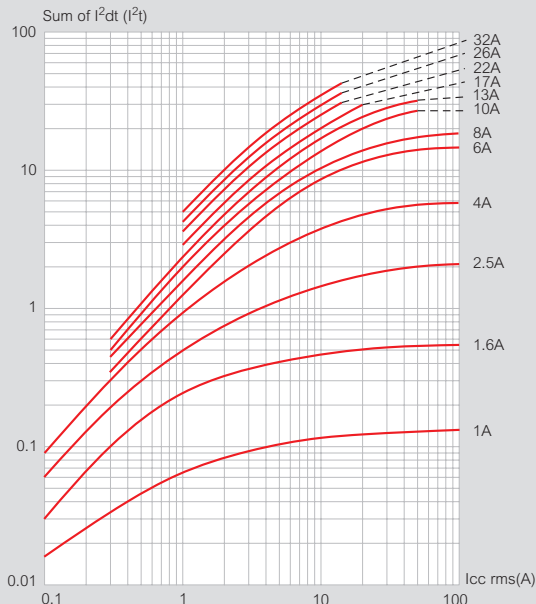


Thermal limit in kA²s in the magnetic operating zone (U_e=415V) (continued)



MPX³ 32H / 32MA

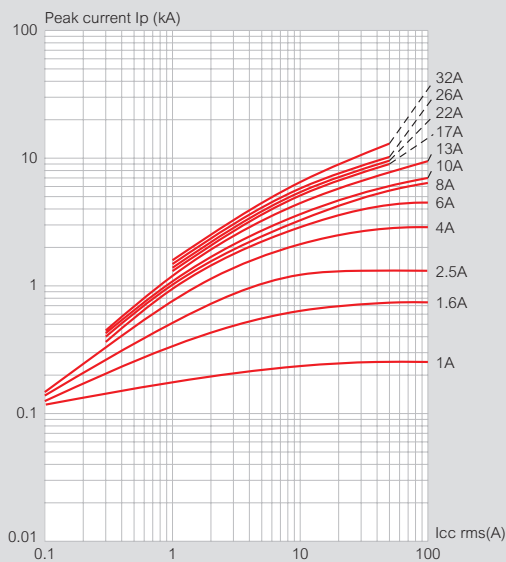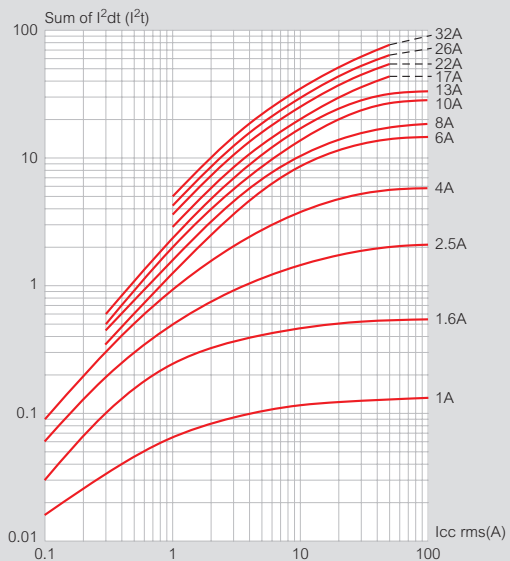

MPX³ 63H

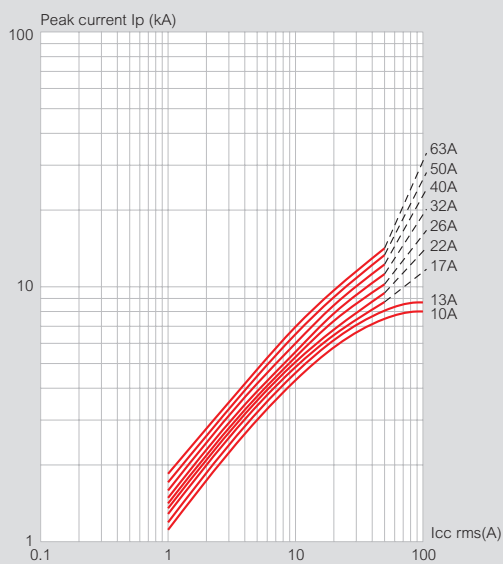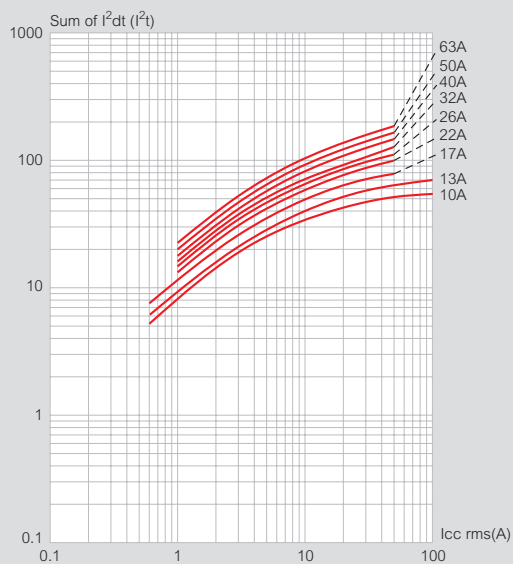


MPX³ 100H

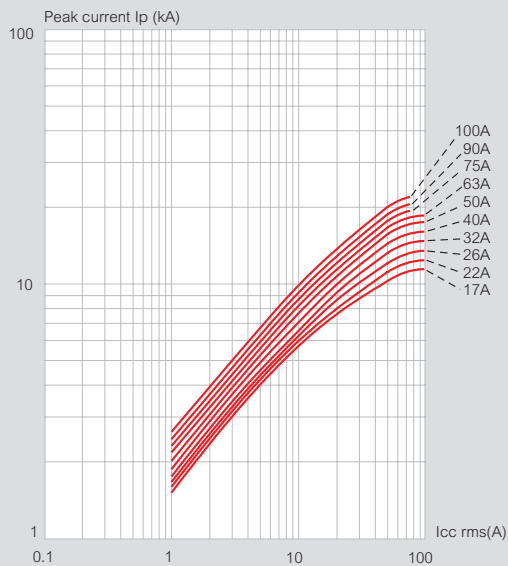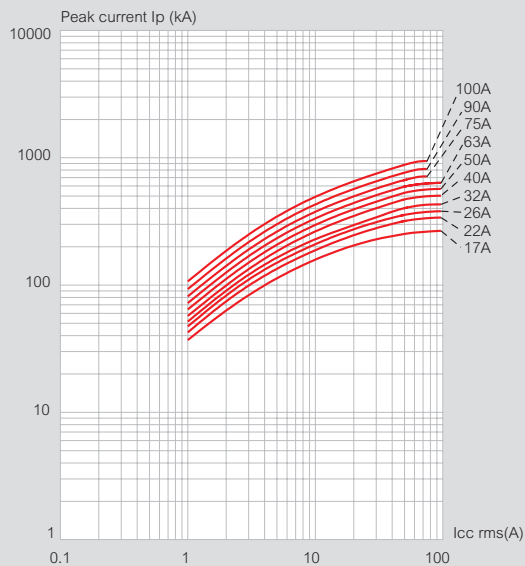

MPCBs MPX³


dimensions

MPX³ 32S

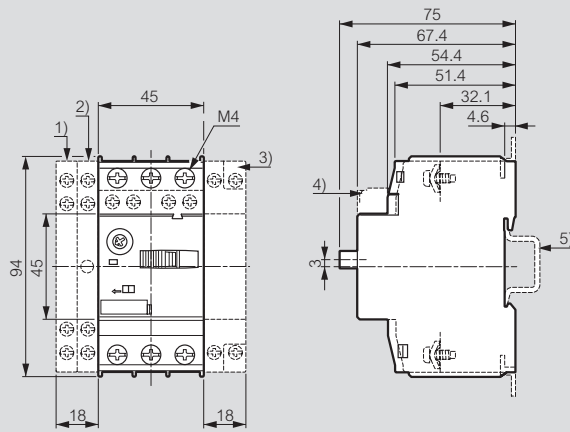

Weight: 0.320 kg


- 1) Side auxiliary contact
- 2) Side magnetic trip alarm contact
- 3) Side shunt release or Side undervoltage release
- 4) Front auxiliary contact
- 5) 35 mm standard mounting rail acc. to EN 50 022

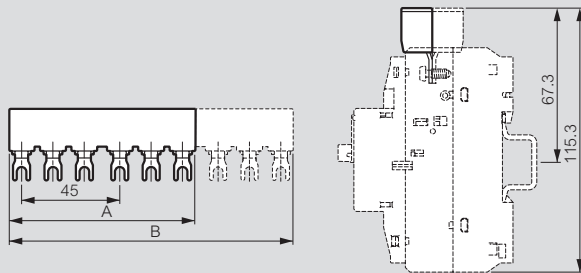

Cat.Nos	Numbers of MPX ³	A ⁽¹⁾ (mm)	B (mm)
4 174 71	2	85	-
4 174 73	3	-	130
4 174 75	4	-	175
4 174 76	5	-	220


(1) Only for Cat.No 4 174 71

MPX³ 32H / 32MA

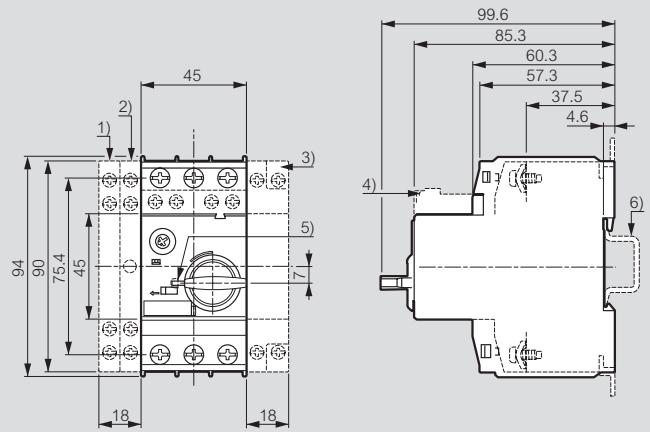

Weight: 0.360 kg


- 1) Side auxiliary contact
- 2) Side magnetic trip alarm contact
- 3) Side shunt release or Side undervoltage release
- 4) Front auxiliary contact
- 5) Handle lock in OFF position (Ø 5 mm)
- 6) 35 mm standard mounting rail acc. to EN 50 022

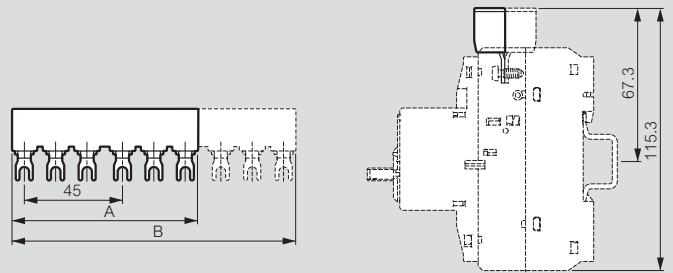


Cat.Nos	Numbers of MPX ³	A ⁽¹⁾ (mm)	B (mm)
4 174 71	2	85	-
4 174 73	3	-	130
4 174 75	4	-	175
4 174 76	5	-	220

(1) Only for Cat.No 4 174 71



MPX³ 63H

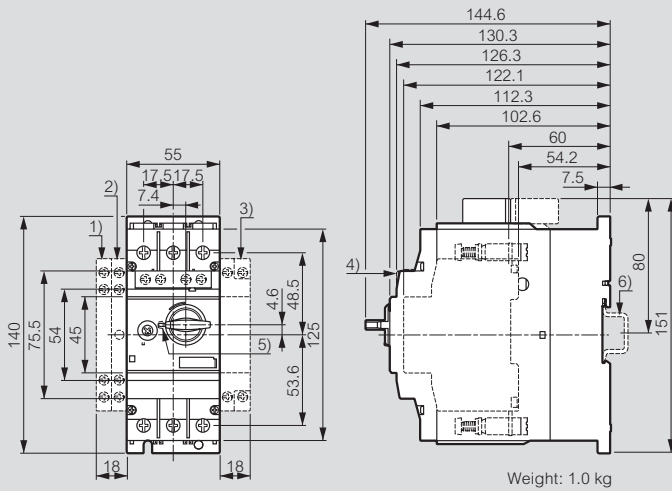


Weight: 1.0 kg




- 1) Side auxiliary contact
- 2) Side magnetic trip alarm contact
- 3) Side shunt release or Side undervoltage release
- 4) Front auxiliary contact
- 5) Handle lock in OFF position (Ø 5 mm)
- 6) 35 mm standard mounting rail acc. to EN 50 022



MPX³ 100H

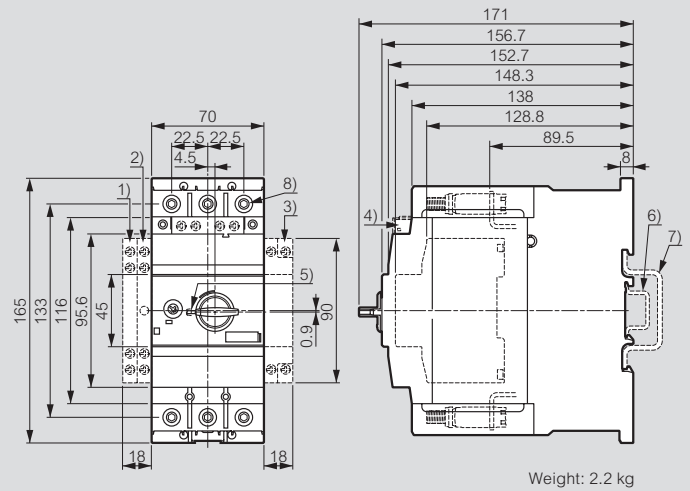

Weight: 2.2 kg



- 1) Side auxiliary contact
- 2) Side magnetic trip alarm contact
- 3) Side shunt release or Side undervoltage release
- 4) Front auxiliary contact
- 5) Handle lock in OFF position (Ø 5 mm)
- 6) 35 mm standard mounting rail acc. to EN 50 022
- 7) 75 mm standard mounting rail acc. to EN 50 023
- 8) 4 mm hexagon socket screw

Cat.Nos	Numbers of MPX ³	A ⁽¹⁾ (mm)	B (mm)
4 174 72	2	110	-
4 174 74	3	-	165


(1) Only for Cat.No 4 174 72

MPCBs MPX³


dimensions (continued)

External Handle


MPX³ 32H / 32MA - Cat.No 4 174 63

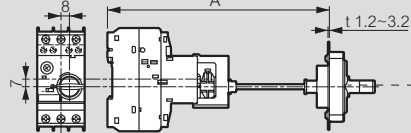


MPX³ 63H - Cat.No 4 174 64

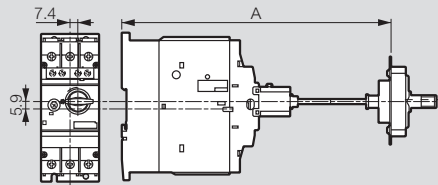

MPX³ 100H - Cat.No 4 174 65

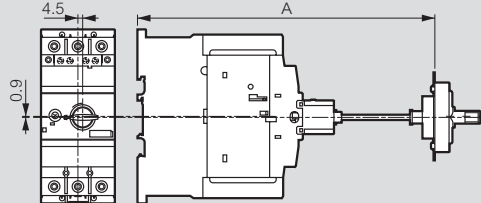


Cat.Nos	A (mm)	MMS Type
4 174 63	min: 148.6	MPX ³ 32H / 32MA
	max: 410.6 (Shaft 315mm)	
4 174 64	min: 193.6	MPX ³ 63H
	max: 455.6 (Shaft 315mm)	
4 174 65	min: 220	MPX ³ 100H
	max: 482 (Shaft 315mm)	




Phase Bus

Cat.Nos 4 174 71/73/75/76

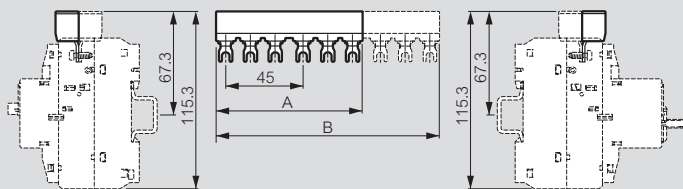


Cat.Nos 4 174 72/74

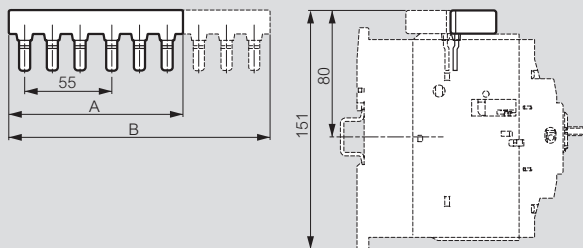

Cat.Nos	Number of MPX ³	A (mm)	B (mm)
4 174 71	2	85	-
4 174 72	3	-	130
4 174 73	2	110	-
4 174 74	3	-	165
4 174 75	4	-	175
4 174 76	5	-	220


Enclosure

Cat.Nos 4 174 80/81

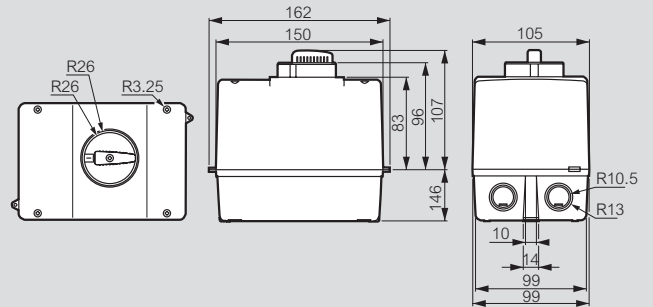

Mounting units - installation principle

Cat.Nos 4 174 60/61/62

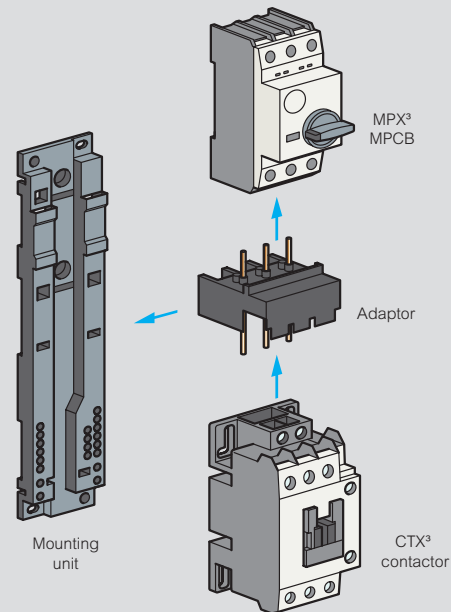





MPX ³ MPCB	CTX ³ contactor	Adaptor	Mounting unit
MPX ³ 32S	CTX ³ mini ~	4 174 40	4 174 60
	CTX ³ mini =	4 174 41	
	CTX ³ 22 ~	4 174 48	
	CTX ³ 22 =	4 174 49	
	CTX ³ 40 ~	4 174 52	
MPX ³ 32H/MA	CTX ³ 40 =	4 174 53	
	CTX ³ mini ~	4 174 42	
	CTX ³ mini =	4 174 43	
	CTX ³ 22 ~	4 174 50	
	CTX ³ 22 =	4 174 51	
MPX ³ 63H	CTX ³ 40 ~	4 174 54	
	CTX ³ 40 =	4 174 55	
	CTX ³ 65 ~	4 174 56	
MPX ³ 100H	CTX ³ 65 =	4 174 57	4 174 61
	CTX ³ 100 ~	4 174 58	4 174 62
	CTX ³ 100 =	4 174 59	


MPCBs MPX³


technical characteristics

Terminals

			MPX ³ 32S	MPX ³ 32H / 32 MA	MPX ³ 63H	MPX ³ 100H
Conformity to standards			IEC60947 UL508, UL508 Type E			
Approvals			CE, UL			
Terminal type						
Single-core	1 conductor	(mm ²) / (AWG)	1...10 / 18...8	1...10 / 18...8	0.75...35 / 18...2	2.5...70 / 12...2/0
	2 conductor	(mm ²) / (AWG)	1...6 / 18...10	1...6 / 18...10	0.75...25 / 18...4	2.5...50 / 12...1/0
Stranded	1 conductor	(mm ²) / (AWG)	1...6 / 18...10	1...6 / 18...10	0.75...35 / 18...2	2.5...70 / 12...2/0
	2 conductor	(mm ²) / (AWG)	1...6 / 18...10	1...6 / 18...10	0.75...25 / 18...4	2.5...50 / 12...1/0
Flexible	1 conductor	(mm ²) / (AWG)	1...6 / 18...10	1...6 / 18...10	0.75...25 / 18...4	2.5...50 / 12...1/0
	2 conductor	(mm ²) / (AWG)	0.75...4 / 18...10	0.75...4 / 18...10	0.75...16 / 18...6	2.5...35 / 10...2
Tightening torque		(Nm) / (lb-in)	0.8...2.5 / 7...22	0.8...2.5 / 7...22	3...4.5 / 26...39	4...6 / 35...53







Auxiliaries













			Auxiliary contacts for front mounting		Auxiliary contacts for left side mounting		Alarm switch for left side mounting	
Rated thermal current / th at 40 °C ambient temperature	(A)		5		10		10	
	at 60 °C ambient temperature		3		6		6	
Contact class coordination according to NEMA (UL/CSA-Standards)	AC		A600		A600		A600	
	DC		Q300		Q300		Q300	
Back-up fuses gG, gL			(A) 16		16		16	
Rated supply current	AC-15	(V)	-	240	24	240	24	240
		(A)	-	3	6	4	6	4
	DC-13	(V)	24	220	24	220	24	220
		(A)	1	0.1	2	0.25	2	0.25
Weight (g)			18		30		40	
Terminal type								
Screwdriver			Pozidriv size 2					
Single-core	1 conductor	(mm ²) / (AWG)	0.5...2.5 / 20...14		0.5...2.5 / 20...14			
	2 conductor	(mm ²) / (AWG)	-		0.5...2.5 / 20...14			
Stranded	1 conductor	(mm ²) / (AWG)	0.5...4 / 20...10		0.5...4 / 20...10			
	2 conductor	(mm ²) / (AWG)	0.75...2.5 / 18...14		0.75...2.5 / 18...14			
Tightening torque			(Nm) / (lb-in) 0.8...1.2 / 7...10		0.8...1.2 / 7...10			

			Undervoltage release for right side mounting	Undervoltage release with 2 auxiliary contacts for right side mounting	Shunt release for right side mounting
Actuating voltage	Pull-in		0.7...1.1 x Us	0.85...1.1 x Us	0.85...1.1 x Us
	Drop-out			0.7...0.35 x Us	0.7...0.35 x Us
Rated control voltage	min:		24 V 50 Hz / 28 V 60 Hz	24 V 50 Hz / 28 V 60 Hz	24 V 50 Hz / 28 V 60 Hz
	max:		415-440 V 50 Hz / 460-480 V 60 Hz	415-440 V 50 Hz / 460-480 V 60 Hz	415-440 V 50 Hz / 460-480 V 60 Hz
Coil rating	Pull-in		8.5 VA, 6 W	8.5 VA, 6 W	8.5 VA, 6 W
	Hold		3 VA, 12 W	3 VA, 12 W	3 VA, 12 W
Opening time (ms)			-	20	20
Weight (g)			18	30	40
Terminal type					
Screwdriver			Pozidriv size 2		
Single-core	1 conductor	(mm ²) / (AWG)	0.5...2.5 / 20...14		
	2 conductor	(mm ²) / (AWG)	0.5...2.5 / 20...14		
Standard	1 conductor	(mm ²) / (AWG)	0.5...4 / 20...10		
	2 conductor	(mm ²) / (AWG)	0.75...2.5 / 18...14		
Tightening torque			(Nm) / (lb-in) 0.8...1.2 / 7...10		

3-pole contactors CTX³ and thermal overload relays RTX³

technical characteristics

												
Contactor		CTX ³ mini				CTX ³ 22				CTX ³ 40		
	Size	-				2				3		
	Terminals type	screw				screw				screw		
	Rated operational voltage, U _e	690 V				690 V				690 V		
	Rated insulation voltage, U _i	690 V				690 V				1000 V		
	Rated frequency	50/60 Hz				50/60 Hz				50/60 Hz		
	Rated impulse withstand voltage, U _{imp}	6 kV				6 kV				8 kV		
	Max. operating rate in operation cycle per hour (AC-3)	1800				1800				1800		
Durability in millions of operations	Mechanical	12				15				12		
	Electrical	1				2.5				2		
Current and power	Type	6 A	9 A	12 A	16 A	9 A	12 A	18 A	22 A	32 A	40 A	
	AC-1	Thermal current (A)	20	20	20	20	25	25	40	40	50	60
		200/240 V (kW)	(A)	1.5	2.2	3	4	2.5	3.5	4.5	5.5	7.5
	(A)		7	9	12	15	11	13	18	22	32	40
	380/440 V (kW)	(A)	2.2	4	5.5	7.5	4	5.5	7.5	11	15	18.5
		(A)	6	9	12	16	9	12	18	22	32	40
	500/550 V (kW)	(A)	3	3.7	4	5.5	4	7.5	7.5	15	18.5	22
		(A)	5	6	7	9	7	12	13	20	28	32
	690 V (kW)	(A)	3	4	4	4	4	7.5	7.5	15	18.5	22
		(A)	4	5	5	5	5	9	9	18	20	23
	1000 V (kW)	(A)	-	-	-	-	-	-	-	-	22	22
		(A)	-	-	-	-	-	-	-	-	17	17
UL rating 50/60 Hz	Continuous current (A)	20	20	20	20	25	25	40	40	50	60	
		Single phase	110/220 V (HP)	1/2	1/2	1	-	0.5	0.75	1	2	2
		220/240 V (HP)	1	1.5	2	-	1.5	2	3	3	5	7.5
	Three phase	200/208 V (HP)	-	-	-	-	2	3	5	7.5	7.5	15
		220/240 V (HP)	1.5	3	3	-	3	5	7.5	10	10	15
		440/480 V (HP)	3	5	7.5	-	5	7.5	10	15	20	30
		550/600 V (HP)	3	5	7.5	-	7.5	10	15	20	25	30
	NEMA size	00	00	00	0	00	00	0	1	1	1	
Weight and size	AC control	Weight (kg)	0.17				0.34				0.4	
		Size (W x H x D) (mm)	45 × 58 × 57				45 × 73.5 × 87.4				45 × 83 × 90	
	DC control	Weight (kg)	0.23				0.41				0.6	
		Size (W x H x D) (mm)	45 × 58 × 69				45 × 73.5 × 103.6				45 × 83 × 117.1	
	Integrated auxiliary contacts	1 NO or 1 NC				1 NO + 1 NC				2 NO + 2 NC		
Add on auxiliary block	Side mounting	Yes				Yes				Yes		
	Front mounting	Yes				Yes				Yes		
Thermal overload relay		RTX ³ mini				RTX ³ 40				RTX ³ 40		
												
Terminals type	Standard RTX ³	-				screw				screw		
	Differential RTX ³	screw				screw				screw		
	Rated operational voltage, U _e	690 V				690 V				690 V		
	Rated insulation voltage, U _i	690 V				690 V				690 V		
	Rated impulse withstand voltage, U _{imp}	6 kV				6 kV				6 kV		
	Trip class	10 A				10 A				10 A		
	Setting	0.1 to 16 A				0.1 to 40 A				0.1 to 40 A		
Weight and size	Weight (kg)	0.1				0.17				0.17		
	Size (W x H x D) (mm)	45 × 73 × 63				45 × 75 × 90				45 × 75 × 90		

														
CTX³ 65		CTX³ 100			CTX³ 150		CTX³ 225		CTX³ 400			CTX³ 800		
4		5			6		7		8			9		
screw or cage		screw or cage			screw or cage		screw		screw			screw		
690 V		690 V			690 V		690 V		690 V			690 V		
1000 V		1000 V			1000 V		1000 V		1000 V			1000 V		
50/60 Hz		50/60 Hz			50/60 Hz		50/60 Hz		50/60 Hz			50/60 Hz		
8 kV		8 kV			8 kV		8 kV		8 kV			8 kV		
1800		1800			1200		1200		1200			1200		
12		12			5		5		5			2.5		
2		2			1		1		1			0.5		
50 A	65 A	75 A	85 A	100 A	130 A	150 A	185 A	225 A	265 A	330 A	400 A	500 A	630 A	800 A
70	100	110	135	160	160	210	230	275	300	350	450	580	660	900
15	18.5	22	25	30	37	45	55	75	80	90	125	147	190	220
55	65	75	85	105	130	150	185	225	265	330	400	500	630	800
22	30	37	45	55	60	75	90	132	147	160	200	265	330	440
50	65	75	85	105	130	150	185	225	265	330	400	500	630	800
30	33	37	45	55	60	70	110	132	147	160	225	265	330	500
43	60	64	75	85	90	100	180	200	225	280	350	400	500	720
30	33	37	45	55	55	55	110	140	160	200	250	300	400	500
28	35	42	45	65	60	60	120	150	185	225	300	380	420	630
30	30	37	27	37	75	75	132	132	147	147	147	220	220	220
23	23	28	28	28	53	53	90	90	105	105	105	280	280	280
70	100	110	135	160	160	210	230	275	300	350	450	580	660	900
3	5	5	7.5	10	10	15	15	15	-	-	-	-	-	-
10	15	15	15	20	20	25	30	40	-	-	-	-	-	-
20	25	25	30	30	40	40	60	60	75	100	125	150	200	200
25	30	30	40	40	40	50	60	75	100	125	150	200	250	300
40	50	50	60	75	75	100	125	150	200	250	300	400	500	600
50	60	60	75	75	75	75	125	150	200	250	300	400	500	600
2	2	2	3	3	3	4	4	4	5	5	5	6	6	7
0.9		1.6			2.4		5.4		9.2			22.4		
55 × 106 × 119		70 × 140 × 135.8			95 × 158 × 130.3		138 × 203 × 185.1		163 × 243 × 204.4			285 × 312 × 245.3		
1.2		2.6			2.4		5.4		9.2			22.4		
55 × 106 × 146.4		70 × 140 × 172.3			95 × 158 × 130.3		138 × 203 × 185.1		163 × 243 × 204.4			285 × 312 × 245.3		
2 NO + 2 NC		2 NO + 2 NC			2 NO + 2 NC		2 NO + 2 NC		2 NO + 2 NC			2 NO + 2 NC		
Yes		Yes			Yes		Yes		Yes			Yes		
Yes		Yes			Yes		No		No			No		
RTX³ 65		RTX³ 100			RTX³ 150		RTX³ 225		RTX³ 400			RTX³ 800		
														
screw		screw			screw		-		-			-		
cage		cage			cage		screw		screw			screw		
690 V		690 V			690 V		690 V		690 V			690 V		
690 V		690 V			690 V		690 V		690 V			690 V		
6 kV		6 kV			6 kV		6 kV		6 kV			6 kV		
10 A		10 A			10 A		10 A		10 A			10 A		
9 to 65 A		18 to 100 A			45 to 150 A		65 to 240 A		85 to 400 A			200 to 800 A		
0.31/0.33		0.48/0.5			0.67		2.5		2.6			11.5		
55 × 81 × 100		70 × 97 × 110			95 × 109 × 113		147 × 141 × 184		151 × 171 × 198			360 × 530 × 212		

Mini contactors CTX³ 6 to 16 A industrial contactors



4 170 00



4 170 01

Dimensions p. 31

Pack	Cat. Nos		3-pole mini contactors		
			With integrated auxiliary contact Power terminals: screw terminals		
			6 A (AC3)		
			Integrated auxiliary contact		
			1 NO	1 NC	
1	4 170 00	4 170 10	3-phase motor 400/415 V		Control Voltage
1	4 170 01	4 170 11	2.2 kW		24 V~
1	4 170 04	4 170 14	2.2 kW		24 V=
1	4 170 06	4 170 16	2.2 kW		110 V~
1	4 170 09	4 170 19	2.2 kW		230 V~
			2.2 kW		415 V~
			9 A (AC3)		
1	4 170 20	4 170 30	4 kW		24 V~
1	4 170 21	4 170 31	4 kW		24 V=
1	4 170 24	4 170 34	4 kW		110 V~
1	4 170 26	4 170 36	4 kW		230 V~
1	4 170 29	4 170 39	4 kW		415 V~
			12 A (AC3)		
1	4 170 40	4 170 50	5.5 kW		24 V~
1	4 170 41	4 170 51	5.5 kW		24 V=
1	4 170 44	4 170 54	5.5 kW		110 V~
1	4 170 46	4 170 56	5.5 kW		230 V~
1	4 170 49	4 170 59	5.5 kW		415 V~
			16 A (AC3)		
1	4 170 60	4 170 70	7.5 kW		24 V~
1	4 170 61	4 170 71	7.5 kW		24 V=
1	4 170 64	4 170 74	7.5 kW		110 V~
1	4 170 66	4 170 76	7.5 kW		230 V~
1	4 170 69	4 170 79	7.5 kW		415 V~

Pack	Cat. Nos		4-pole mini contactors		
			Without integrated auxiliary contact Power terminals: screw terminals		
			20 A		
			Max. operating current AC 1	Max. operating current AC 3	Control Voltage
1	4 171 40		20 A	16 A	24 V~
1	4 171 41		20 A	16 A	24 V=
1	4 171 44		20 A	16 A	110 V~
1	4 171 46		20 A	16 A	230 V~
1	4 171 49		20 A	16 A	415 V~

 CTX³ control relays
p. 37


Thermal relays and accessories for mini contactors



4 170 88



4 171 55

 Dimensions p. 31
Tripping curves p. 49

Pack	Cat. Nos	Thermal overload relays for 3-pole mini contactors
		Class 10A Integrated auxiliary contacts 1 NO + 1 NC
1	4 170 80	0.16 A
1	4 170 81	0.25 A
1	4 170 82	0.40 A
1	4 170 83	0.63 A
1	4 170 84	1 A
1	4 170 85	1.6 A
1	4 170 86	2.5 A
1	4 170 87	4 A
1	4 170 88	6 A
1	4 170 89	8 A
1	4 170 90	9 A
1	4 170 91	10 A
1	4 170 92	13 A
1	4 170 93	16 A

Pack	Cat. Nos	Add on auxiliary blocks for mini contactors
		Ith : 10 A
		Front mounting
15	4 171 50	1 NO + 1 NC
15	4 171 51	2 NO
15	4 171 52	2 NC
15	4 171 53	4 NO
15	4 171 54	3 NO + 1 NC
15	4 171 55	2 NO + 2 NC
15	4 171 56	1 NO + 3 NC
15	4 171 57	4 NC
		Side mounting
20	4 171 58	1 NO
20	4 171 59	1 NC

Pack	Cat. Nos	Interlock Unit
1	4 171 60	Mechanical interlock for mini contactors

Pack	Cat. Nos	Spare coils
10	4 171 70	24 V~
10	4 171 71	24 V=
10	4 171 74	110 V~
10	4 171 76	230 V~
10	4 171 79	415 V~

Mini contactors CTX³


technical characteristics and dimensions

Environmental conditions

- Storage temperature: -30 °C to +65 °C
- Operating temperature: -5 °C to +40 °C
- Operating altitude: 2000 m
- Protection degree: IP 20
- Shock resistance: 5 G
- Vibration resistance (10-55 Hz): 2 G


Mini contactors 3P and 4P and control relays

AC control


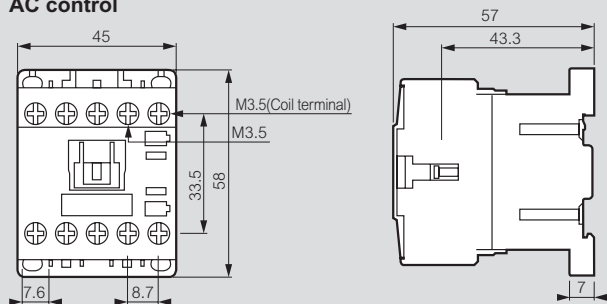


Possible combinations of auxiliary blocks per contactor


Auxiliary contact block	Maximum number of blocks		
	Side mounting (1 contact)	Front mounting (2 contacts)	Front mounting (4 contacts)
CTX ³ mini and control relay Control voltage : ~	2	0	1
	4	1	0
	6	0	0
CTX ³ mini and control relay Control voltage : =	2	0	0
	0	1	0



DC control

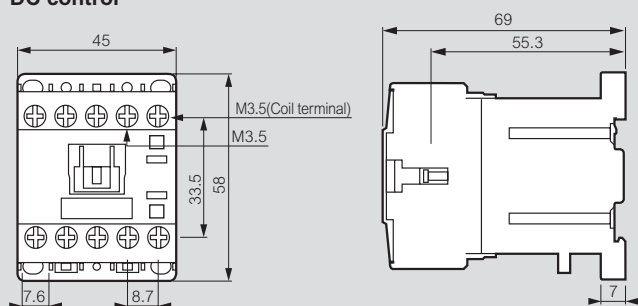


Thermal overload relays for mini contactors

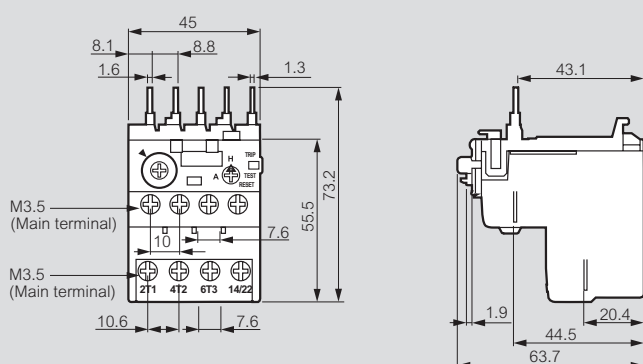


Auxiliary contacts

Front mounting

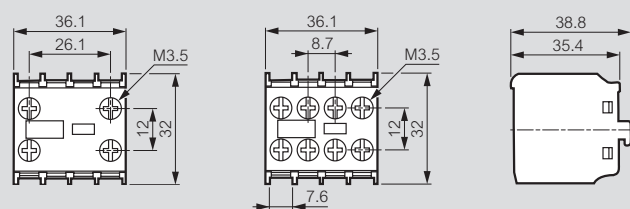

Side mounting



3-pole contactors CTX³

9 A to 100 A industrial contactors



4 160 96 4 161 26 4 161 46 4 161 56 4 161 86 4 161 96

Technical characteristics and coordination with circuit breakers **p. 38-39**
 Dimensions **p. 39-41**

Conform to IEC 60947-1, IEC 60947-4-1
 Can be equipped with RTX³ thermal relays (p. 34-35) add-on auxiliary contact blocks, time delay blocks, capacitor switching units and CTX³ interlocking (p. 36)

Pack	Cat.Nos	CTX³ 22		
		With integrated auxiliary contacts Power terminals: screw terminals		
		9 A (AC3) - 25 A (AC1)		
	Screw terminals	3-phase motor 400/415 V	Control Voltage	Integrated auxiliary contacts
1	4 160 80	4 kW	24 V~	1 NO + 1 NC
1	4 160 81	4 kW	24 V=	1 NO + 1 NC
1	4 160 82	4 kW	48 V~	1 NO + 1 NC
1	4 160 83	4 kW	48 V=	1 NO + 1 NC
1	4 160 84	4 kW	110 V~	1 NO + 1 NC
1	4 160 86	4 kW	230 V~	1 NO + 1 NC
1	4 160 88	4 kW	380 V~	1 NO + 1 NC
1	4 160 89	4 kW	415 V~	1 NO + 1 NC
		12 A (AC3) - 25 A (AC1)		
1	4 160 90	5.5 kW	24 V~	1 NO + 1 NC
1	4 160 91	5.5 kW	24 V=	1 NO + 1 NC
1	4 160 92	5.5 kW	48 V~	1 NO + 1 NC
1	4 160 93	5.5 kW	48 V=	1 NO + 1 NC
1	4 160 94	5.5 kW	110 V~	1 NO + 1 NC
1	4 160 96	5.5 kW	230 V~	1 NO + 1 NC
1	4 160 98	5.5 kW	380 V~	1 NO + 1 NC
1	4 160 99	5.5 kW	415 V~	1 NO + 1 NC
		18 A (AC3) - 40 A (AC1)		
1	4 161 00	7.5 kW	24 V~	1 NO + 1 NC
1	4 161 01	7.5 kW	24 V=	1 NO + 1 NC
1	4 161 02	7.5 kW	48 V~	1 NO + 1 NC
1	4 161 03	7.5 kW	48 V=	1 NO + 1 NC
1	4 161 04	7.5 kW	110 V~	1 NO + 1 NC
1	4 161 06	7.5 kW	230 V~	1 NO + 1 NC
1	4 161 08	7.5 kW	380 V~	1 NO + 1 NC
1	4 161 09	7.5 kW	415 V~	1 NO + 1 NC
		22 A (AC3) - 40 A (AC1)		
1	4 161 10	11 kW	24 V~	1 NO + 1 NC
1	4 161 11	11 kW	24 V=	1 NO + 1 NC
1	4 161 12	11 kW	48 V~	1 NO + 1 NC
1	4 161 13	11 kW	48 V=	1 NO + 1 NC
1	4 161 14	11 kW	110 V~	1 NO + 1 NC
1	4 161 16	11 kW	230 V~	1 NO + 1 NC
1	4 161 18	11 kW	380 V~	1 NO + 1 NC
1	4 161 19	11 kW	415 V~	1 NO + 1 NC

Pack	Cat.Nos	CTX³ 40			
		With integrated auxiliary contacts Power terminals: screw terminals			
		32 A (AC3) - 50 A (AC1)			
	Screw terminals	3-phase motor 400/415 V	Control Voltage	Integrated auxiliary contacts	
1	4 161 20	15 kW	24 V~	2 NO + 2 NC	
1	4 161 21	15 kW	24 V=	2 NO + 2 NC	
1	4 161 22	15 kW	48 V~	2 NO + 2 NC	
1	4 161 23	15 kW	48 V=	2 NO + 2 NC	
1	4 161 24	15 kW	110 V~	2 NO + 2 NC	
1	4 161 26	15 kW	230 V~	2 NO + 2 NC	
1	4 161 28	15 kW	380 V~	2 NO + 2 NC	
1	4 161 29	15 kW	415 V~	2 NO + 2 NC	
		40 A (AC3) - 60 A (AC1)			
1	4 161 30	18.5 kW	24 V~	2 NO + 2 NC	
1	4 161 31	18.5 kW	24 V=	2 NO + 2 NC	
1	4 161 32	18.5 kW	48 V~	2 NO + 2 NC	
1	4 161 33	18.5 kW	48 V=	2 NO + 2 NC	
1	4 161 34	18.5 kW	110 V~	2 NO + 2 NC	
1	4 161 36	18.5 kW	230 V~	2 NO + 2 NC	
1	4 161 38	18.5 kW	380 V~	2 NO + 2 NC	
1	4 161 39	18.5 kW	415 V~	2 NO + 2 NC	
		CTX³ 65			
		With integrated auxiliary contacts			
		50 A (AC3) - 70 A (AC1)			
	Screw terminals	Cage terminals	3-phase motor 400/415 V	Control Voltage	Integrated auxiliary contacts
1	4 161 40	4 161 50	22 kW	24 V~	2 NO + 2 NC
1	4 161 41	4 161 51	22 kW	24 V=	2 NO + 2 NC
1	4 161 42	4 161 52	22 kW	48 V~	2 NO + 2 NC
1	4 161 43	4 161 53	22 kW	48 V=	2 NO + 2 NC
1	4 161 44	4 161 54	22 kW	110 V~	2 NO + 2 NC
1	4 161 46	4 161 56	22 kW	230 V~	2 NO + 2 NC
1	4 161 48	4 161 58	22 kW	380 V~	2 NO + 2 NC
1	4 161 49	4 161 59	22 kW	415 V~	2 NO + 2 NC
		65 A (AC3) - 100 A (AC1)			
1	4 161 60	4 161 70	30 kW	24 V~	2 NO + 2 NC
1	4 161 61	4 161 71	30 kW	24 V=	2 NO + 2 NC
1	4 161 62	4 161 72	30 kW	48 V~	2 NO + 2 NC
1	4 161 63	4 161 73	30 kW	48 V=	2 NO + 2 NC
1	4 161 64	4 161 74	30 kW	110 V~	2 NO + 2 NC
1	4 161 66	4 161 76	30 kW	230 V~	2 NO + 2 NC
1	4 161 68	4 161 78	30 kW	380 V~	2 NO + 2 NC
1	4 161 69	4 161 79	30 kW	415 V~	2 NO + 2 NC

Add-on auxiliary contact blocks **p. 36**



3-pole contactors CTX³

130 A to 800 A industrial contactors



4 162 46



4 162 56



4 162 96



4 163 56

Technical characteristics and coordination with circuit breakers **p. 38-39**
 Dimensions **p. 39-41**

Conform to IEC 60947-1, IEC 60947-4-1

Can be equipped with RTX³ thermal relays (p. 34-35) add-on auxiliary contact blocks, time delay blocks (except CTX³ 225/400/800) and CTX³ interlocking (p. 36)

Pack	Cat.Nos		CTX³ 100		
			With integrated auxiliary contacts		
			75 A (AC3) - 110 A (AC1)		
	Screw terminals	Cage terminals	3-phase motor 400/415 V	Control Voltage	Integrated auxiliary contacts
1	4 161 80	4 161 90	37 kW	24 V~	2 NO + 2 NC
1	4 161 81	4 161 91	37 kW	24 V=	2 NO + 2 NC
1	4 161 82	4 161 92	37 kW	48 V~	2 NO + 2 NC
1	4 161 83	4 161 93	37 kW	48 V=	2 NO + 2 NC
1	4 161 84	4 161 94	37 kW	110 V~	2 NO + 2 NC
1	4 161 86	4 161 96	37 kW	230 V~	2 NO + 2 NC
1	4 161 88	4 161 98	37 kW	380 V~	2 NO + 2 NC
1	4 161 89	4 161 99	37 kW	415 V~	2 NO + 2 NC
			85 A (AC3) - 135 A (AC1)		
1	4 162 00	4 162 10	45 kW	24 V~	2 NO + 2 NC
1	4 162 01	4 162 11	45 kW	24 V=	2 NO + 2 NC
1	4 162 02	4 162 12	45 kW	48 V~	2 NO + 2 NC
1	4 162 03	4 162 13	45 kW	48 V=	2 NO + 2 NC
1	4 162 04	4 162 14	45 kW	110 V~	2 NO + 2 NC
1	4 162 06	4 162 16	45 kW	230 V~	2 NO + 2 NC
1	4 162 08	4 162 18	45 kW	380 V~	2 NO + 2 NC
1	4 162 09	4 162 19	45 kW	415 V~	2 NO + 2 NC
			100 A (AC3) - 160 A (AC1)		
1	4 162 20	4 162 30	55 kW	24 V~	2 NO + 2 NC
1	4 162 21	4 162 31	55 kW	24 V=	2 NO + 2 NC
1	4 162 22	4 162 32	55 kW	48 V~	2 NO + 2 NC
1	4 162 23	4 162 33	55 kW	48 V=	2 NO + 2 NC
1	4 162 24	4 162 34	55 kW	110 V~	2 NO + 2 NC
1	4 162 26	4 162 36	55 kW	230 V~	2 NO + 2 NC
1	4 162 28	4 162 38	55 kW	380 V~	2 NO + 2 NC
1	4 162 29	4 162 39	55 kW	415 V~	2 NO + 2 NC

Pack	Cat.Nos		CTX³ 150		
			With integrated auxiliary contacts		
			130 A (AC3) - 160 A (AC1)		
	Screw terminals	Cage terminals	3-phase motor 400/415 V	Control Voltage	Integrated auxiliary contacts
1	4 162 40	4 162 50	60 kW	24 V~	2 NO + 2 NC
1	4 162 41	4 162 51	60 kW	24 V=	2 NO + 2 NC
1	4 162 42	4 162 52	60 kW	48 V~	2 NO + 2 NC
1	4 162 43	4 162 53	60 kW	48 V=	2 NO + 2 NC
1	4 162 46	4 162 56	60 kW	100-240 V~/=	2 NO + 2 NC
1	4 162 49	4 162 59	60 kW	400-440 V~	2 NO + 2 NC
			150 A (AC3) - 210 A (AC1)		
1	4 162 60	4 162 70	75 kW	24 V~	2 NO + 2 NC
1	4 162 61	4 162 71	75 kW	24 V=	2 NO + 2 NC
1	4 162 62	4 162 72	75 kW	48 V~	2 NO + 2 NC
1	4 162 63	4 162 73	75 kW	48 V=	2 NO + 2 NC
1	4 162 66	4 162 76	75 kW	100-240 V~/=	2 NO + 2 NC
1	4 162 69	4 162 79	75 kW	400-440 V~	2 NO + 2 NC

Pack	Cat.Nos		CTX³ 225		
			With integrated auxiliary contacts		
			185 A (AC3) - 230 A (AC1)		
	Screw terminals		3-phase motor 400/415 V	Control Voltage	Integrated auxiliary contacts
1	4 162 80		90 kW	24 V~/=	2 NO + 2 NC
1	4 162 82		90 kW	48 V~/=	2 NO + 2 NC
1	4 162 86		90 kW	100-240 V~/=	2 NO + 2 NC
1	4 162 89		90 kW	380-450 V~	2 NO + 2 NC
			225 A (AC3) - 275 A (AC1)		
1	4 162 90		132 kW	24 V~/=	2 NO + 2 NC
1	4 162 92		132 kW	48 V~/=	2 NO + 2 NC
1	4 162 96		132 kW	100-240 V~/=	2 NO + 2 NC
1	4 162 99		132 kW	380-450 V~	2 NO + 2 NC


Pack	Cat.Nos		CTX³ 400		
			With integrated auxiliary contacts		
			265 A (AC3) - 300 A (AC1)		
	Screw terminals		3-phase motor 400/415 V	Control Voltage	Integrated auxiliary contacts
1	4 163 06		147 kW	100-240 V~/=	2 NO + 2 NC
1	4 163 09		147 kW	380-450 V~	2 NO + 2 NC
			330 A (AC3) - 350 A (AC1)		
1	4 163 16		160 kW	100-240 V~/=	2 NO + 2 NC
1	4 163 19		160 kW	380-450 V~	2 NO + 2 NC
			400 A (AC3) - 450 A (AC1)		
1	4 163 26		200 kW	100-240 V~/=	2 NO + 2 NC
1	4 163 29		200 kW	380-450 V~	2 NO + 2 NC

Pack	Cat.Nos		CTX³ 800		
			With integrated auxiliary contacts		
			500 A (AC3) - 580 A (AC1)		
	Screw terminals		3-phase motor 400/415 V	Control Voltage	Integrated auxiliary contacts
1	4 163 36		265 kW	200-240 V~/=	2 NO + 2 NC
1	4 163 39		265 kW	380-450 V~	2 NO + 2 NC
			630 A (AC3) - 660 A (AC1)		
1	4 163 46		330 kW	200-240 V~/=	2 NO + 2 NC
1	4 163 49		330 kW	380-450 V~	2 NO + 2 NC
			800 A (AC3) - 900 A (AC1)		
1	4 163 56		440 kW	200-240 V~/=	2 NO + 2 NC
1	4 163 59		440 kW	380-450 V~	2 NO + 2 NC

Spare coils **p. 37**

Thermal relays RTX³

for CTX³ 3-pole industrial contactors

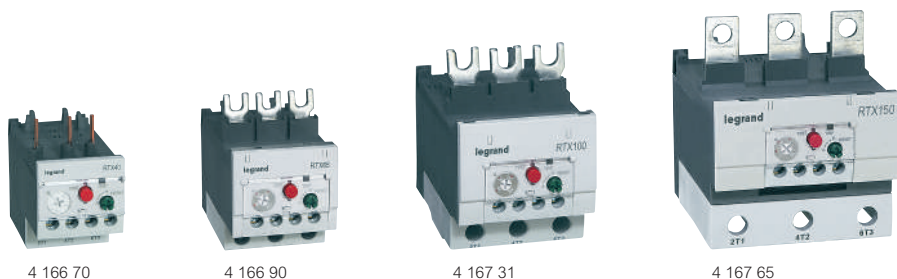

Dimensions p. 42-43
 Tripping curves p. 46-49

Thermal protection against overloads, long starting times and lasting stalling of the motor
 Differential type ensures a better protection in case of one phase failure thanks to faster tripping
 Conform to IEC 60 947-1, IEC 60 947-4-1

Pack	Cat. Nos		Thermal overload relays		
			Class 10A Integrated auxiliary contacts 1 NO + 1 NC		
			RTX³ 40		
			For CTX ³ 22 and 40 With screw terminals		
	Type		Adjustment range		
	standard	diff.	I min. (A)		I max. (A)
1	4 166 40	4 166 60	0.1		0.16
1	4 166 41	4 166 61	0.16		0.25
1	4 166 42	4 166 62	0.25		0.4
1	4 166 43	4 166 63	0.4		0.63
1	4 166 44	4 166 64	0.63		1
1	4 166 45	4 166 65	1		1.6
1	4 166 46	4 166 66	1.6		2.5
1	4 166 47	4 166 67	2.5		4
1	4 166 48	4 166 68	4		6
1	4 166 49	4 166 69	5		8
1	4 166 50	4 166 70	6		9
1	4 166 51	4 166 71	7		10
1	4 166 52	4 166 72	9		13
1	4 166 53	4 166 73	12		18
1	4 166 54	4 166 74	16		22
1	4 166 55	4 166 75	18		25
1	4 166 56	4 166 76	22		32
1	4 166 57	4 166 77	28		40
			RTX³ 65		
			For CTX ³ 65 Standard type with screw terminals Differential type with cage terminals		
1	4 166 83	4 167 03	9		13
1	4 166 84	4 167 04	12		18
1	4 166 85	4 167 05	16		22
1	4 166 86	4 167 06	18		25
1	4 166 87	4 167 07	24		36
1	4 166 88	4 167 08	28		40
1	4 166 89	4 167 09	34		50
1	4 166 90	4 167 10	45		65

Pack	Cat. Nos		Thermal overload relays (continued)		
			Class 10A Integrated auxiliary contacts 1 NO + 1 NC		
			RTX³ 100		
			For CTX ³ 100 Standard type with screw terminals Differential type with cage terminals		
	Type		Adjustment range		
	standard	diff.	I min. (A)		I max. (A)
1	4 167 23	4 167 43	18		25
1	4 167 24	4 167 44	24		36
1	4 167 25	4 167 45	28		40
1	4 167 26	4 167 46	34		50
1	4 167 27	4 167 47	45		65
1	4 167 28	4 167 48	54		75
1	4 167 29	4 167 49	63		85
1	4 167 30	4 167 50	70		95
1	4 167 31	4 167 51	80		100
			RTX³ 150		
			For CTX ³ 150 Standard type with screw terminals Differential type with cage terminals		
1	4 167 60	4 167 70	45		65
1	4 167 61	4 167 71	54		75
1	4 167 62	4 167 72	63		85
1	4 167 63	4 167 73	80		105
1	4 167 64	4 167 74	95		130
1	4 167 65	4 167 75	110		150
			Separate mounting units		
			To mount the relays separately from contactors, on DIN rail or panel by fixing screws		
1	4 165 91		For RTX ³ 40 up to 32 A		
1	4 165 92		For RTX ³ 40 40 A		
1	4 165 93		For RTX ³ 65 with screw terminals		
1	4 165 94		For RTX ³ 65 with cage terminals		
1	4 165 95		For RTX ³ 100 with screw terminals		
1	4 165 96		For RTX ³ 100 with cage terminals		
1	4 165 97		For RTX ³ 150 with screw terminals		
1	4 165 98		For RTX ³ 150 with cage terminals		




Thermal relays RTX³

for CTX³ 3-pole industrial contactors



4 167 84



4 167 91

Dimensions p. 42-43
Tripping curves p. 46-49

Conform to IEC 60 947-1, IEC 60 947-4-1

Pack	Cat. Nos	Thermal overload relays		
		Class 10A Integrated auxiliary contacts 1 NO + 1 NC		
		RTX³ 225		
		For CTX ³ 225 With screw terminals		
	Type diff	I min. (A)	Adjustment range	I max. (A)
1	4 167 80	65		100
1	4 167 81	85		125
1	4 167 82	100		160
1	4 167 83	120		185
1	4 167 84	160		240
		RTX³ 400		
		For CTX ³ 400 With screw terminals		
1	4 167 86	85		125
1	4 167 87	100		160
1	4 167 88	120		185
1	4 167 89	160		240
1	4 167 90	200		330
1	4 167 91	260		400
		RTX³ 800		
		For CTX ³ 800 With screw terminals		
1	4 167 92	200		300
1	4 167 93	260		400
1	4 167 94	400		600
1	4 167 95	520		800

4-pole contactors CTX³

40 A to 900 A industrial contactors and spare coils



4 164 36



4 164 56



4 164 86

Dimensions p. 44-45


Conform to IEC 60 947-1, IEC 60 947-4-1

Can be equipped with add-on auxiliary contact blocks, time delay blocks (except CTX³ 4P from 165 A to 900 A), and CTX³ interlocking

Pack	Cat. Nos	Contactors CTX ³		
		Power terminals: screw terminals		
		Without integrated auxiliary contact		
		Max. operating current AC-1	Max. operating current AC-3	Control Voltage
1	4 164 26	40 A	22 A	230 V~
1	4 164 36	60 A	40 A	230 V~
1	4 164 46	100 A	65 A	230 V~
1	4 164 56	135 A	85 A	230 V~
		With integrated auxiliary contacts		
		Auxiliary contacts: 2 NO + 2 NC		
1	4 164 66	165 A	130 A	100-240 V~/=
1	4 164 76	250 A	150 A	100-240 V~/=
1	4 164 86	330 A	225 A	100-240 V~/=
1	4 164 96	420 A	330 A	100-240 V~/=
1	4 165 06	500 A	400 A	100-240 V~/=
1	4 165 16	750 A	630 A	200-240 V~/=
1	4 165 26	900 A	800 A	200-240 V~/=
		Spare coils for CTX³ 4P contactors		
		Control voltage 230 V~		
1	4 165 46	For CTX ³ 40 A to 60 A (AC-1)		
1	4 165 56	For CTX ³ 100 A to 135 A (AC-1)		
1	4 165 66	For CTX ³ 165 A to 330 A (AC-1)		
1	4 165 76	For CTX ³ 420 A to 500 A (AC-1)		
1	4 165 86	For CTX ³ 750 A to 900 A (AC-1)		

Mechanical interlocks
p. 36



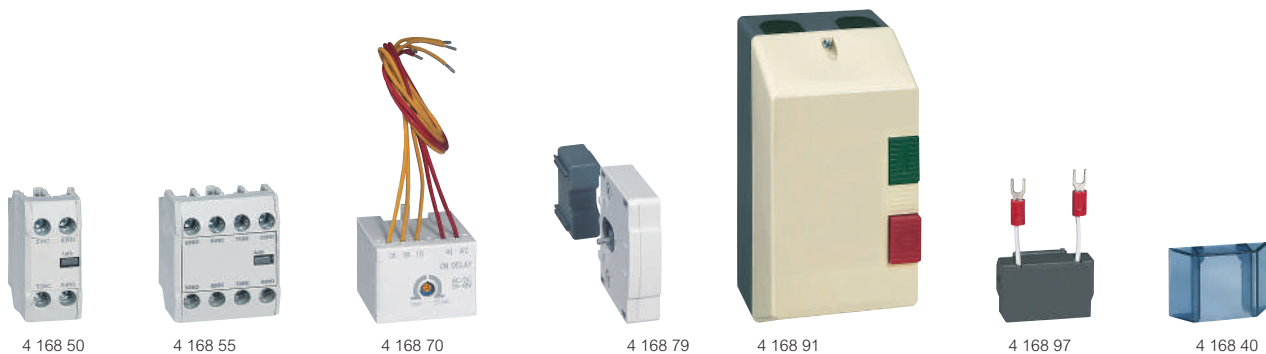

Technical characteristics p. 38-39
 Dimensions p. 39

CTX³ add-on auxiliary contact blocks

Pack	Cat. Nos	
		Front mounting
		For CTX ³ 3P from 9 A to 150 A (AC-3) and CTX ³ 4P from 40 A to 135 A (AC-1)
		2 and 4 pole
		Ith: 16 A
20	4 168 50	1 NO + 1 NC
20	4 168 51	2 NO
20	4 168 52	2 NC
10	4 168 53	4 NO
10	4 168 54	3 NO + 1 NC
10	4 168 55	2 NO + 2 NC
10	4 168 56	1 NO + 3 NC
10	4 168 57	4 NC
		Side mounting
		2-pole
		Mounting on both sides
1	4 168 58	For CTX ³ 3P form 9 A to 150 A (AC-3)
		1 NO + 1 NC - Ith: 16 A
1	4 168 59	For CTX ³ 3P form 185 A to 800 A (AC-3) and CTX ³ 4P from 165 A to 900 A (AC-1)
		1 NO + 1 NC - Ith: 16 A
1	4 168 49	For CTX ³ 4P from 40 A to 135 A (AC-1)
		1 NO + 1 NC - Ith: 16 A

CTX³ time delay blocks

Pack	Cat. Nos	
		For CTX ³ 3P form 9 A to 150 A (AC-3)
		Time delay: 1 to 30 s
		Front mounting
		On delay
1	4 168 70	24-48 V \sim /=
1	4 168 71	110-230 V \sim
		Off delay
1	4 168 72	24-48 V \sim /=
1	4 168 73	110-230 V \sim

CTX³ capacitor switching units

Pack	Cat. Nos	
		AC-6b
		Operating power from 9.7 kVAR to 62 kVAR (400/440 V)
1	4 168 74	For contactors CTX ³ 3P from 9 to 40 A
1	4 168 75	For contactors CTX ³ 3P 50 and 65 A with screw terminals
1	4 168 76	For contactors CTX ³ 3P 50 to 100 A with cage terminals
1	4 168 77	For contactors CTX ³ 3P 75 to 100 A with screw terminals

CTX³ interlocking

Pack	Cat. Nos	
		Component parts for assembling by customer
		Horizontal mounting
		Interlock units
1	4 168 79	Mechanical interlocks for CTX ³ 4P from 40 to 135 A (AC-1) (p. 35)
1	4 168 80	Mechanical interlocks for CTX ³ 3P from 9 to 150 A (p. 32-33)
1	4 168 87	Provides 2 NC contacts for use in electrical interlocking
1	4 168 88	Mechanical interlocks for CTX ³ 3P from 185 to 400 A and CTX ³ 4P from 165 to 500 A (p. 33 and 35)
1	4 168 88	Mechanical interlocks for CTX ³ 3P from 500 to 800 A (p. 33)
1	4 168 89	Mechanical interlocks for CTX ³ 4P from 750 to 900 A (p. 35)
		Wire kits
		Used for making reversing between two 3P contactors (varistors)
4	4 168 82	For CTX ³ 22
6	4 168 83	For CTX ³ 40
2	4 168 84	For CTX ³ 65
1	4 168 85	For CTX ³ 100

Boxes for motor starter

Pack	Cat. Nos	
1	4 168 90	For CTX ³ 22 equipped with RTX ³ 40 (0.1 - 22 A) Without pushbuttons
1	4 168 91	With pushbuttons

CTX³ transient voltage suppressor blocks

Pack	Cat. Nos	
		Absorbs the surge arisen out of the coil of the contactor (varistors)
10	4 168 95	24-48 V \sim /=
10	4 168 96	100-125 V \sim /=
10	4 168 97	200-240 V \sim /=
10	4 168 98	380-400 V \sim

CTX³ terminals covers

Pack	Cat. Nos	
1	4 168 42	For CTX ³ 3P from 185 to 225 A (AC-3)
1	4 168 43	For CTX ³ 3P from 265 to 400 A (AC-3)
1	4 168 44	For CTX ³ 3P from 500 to 900 A (AC-3)
1	4 168 45	For CTX ³ 4P from 165 to 330 A (AC-1)
1	4 168 46	For CTX ³ 4P from 420 to 500 A (AC-1)
1	4 168 47	For CTX ³ 4P from 750 to 900 A (AC-1)

CTX³ safety front cover

Pack	Cat. Nos	
150	4 168 40	For CTX ³ 3P from 9 to 150 A (AC-3) and CTX ³ 4P from 40 to 135 A (AC-1)
150	4 168 41	For CTX ³ 3P from 85 to 800 A (AC-3) and CTX 4P from 165 to 900 A (AC-1)

Distant reset flexible cables for thermal relays

Pack	Cat. Nos	
1	4 168 92	400 mm
1	4 168 93	500 mm
1	4 168 94	600 mm

CTX³ spare coils



4 169 66

Control relays CTX³



4 168 10

Dimensions p. 31

Pack Cat. Nos Spare coils for CTX³ 3P contactors

Pack	Cat. Nos	Spare coils for CTX ³ 3P contactors
		For CTX³ 22
1	4 169 00	24 V \sim
1	4 169 02	48 V \sim
1	4 169 04	110 V \sim
1	4 169 06	230 V \sim
1	4 169 08	380 V \sim
1	4 169 09	415 V \sim
		For CTX³ 40
1	4 169 20	24 V \sim
1	4 169 21	24 V \equiv
1	4 169 22	48 V \sim
1	4 169 23	48 V \equiv
1	4 169 24	110 V \sim
1	4 169 26	230 V \sim
1	4 169 28	380 V \sim
1	4 169 29	415 V \sim
		For CTX³ 65
1	4 169 30	24 V \sim
1	4 169 31	24 V \equiv
1	4 169 32	48 V \sim
1	4 169 33	48 V \equiv
1	4 169 34	110 V \sim
1	4 169 36	230 V \sim
1	4 169 38	380 V \sim
1	4 169 39	415 V \sim
		For CTX³ 100
1	4 169 40	24 V \sim
1	4 169 41	24 V \equiv
1	4 169 42	48 V \sim
1	4 169 43	48 V \equiv
1	4 169 44	110 V \sim
1	4 169 46	230 V \sim
1	4 169 48	380 V \sim
1	4 169 49	415 V \sim
		For CTX³ 150
1	4 169 50	24 V \sim
1	4 169 51	24 V \equiv
1	4 169 52	48 V \sim
1	4 169 53	48 V \equiv
1	4 169 56	100-240 V \sim/\equiv
1	4 169 59	400-440 V \sim
		For CTX³ 225
1	4 169 60	24 V \sim/\equiv
1	4 169 62	48 V \sim/\equiv
1	4 169 66	100-240 V \sim/\equiv
1	4 169 69	400-440 V \sim
		For CTX³ 400
1	4 169 76	100-240 V \sim/\equiv
1	4 169 79	380-450 V \sim
		For CTX³ 800
1	4 169 86	200-240 V \sim/\equiv
1	4 169 89	380-450 V \sim

Pack Cat. Nos CTX³ control relays

Pack	Cat. Nos	CTX ³ control relays
		4-pole Conform to IEC 60 947-1 and IEC 60 947-4-1 for the auxiliary contacts Can be equipped with CTX ³ mini Ith = 10 A Low consumption coil
		4 NO
1	4 168 00	24 V \sim
1	4 168 01	24 V \equiv
1	4 168 02	48 V \sim
1	4 168 03	48 V \equiv
1	4 168 04	110 V \sim
1	4 168 06	230 V \sim
1	4 168 09	400 V \sim
		3 NO + 1 NC
1	4 168 10	24 V \sim
1	4 168 11	24 V \equiv
1	4 168 12	48 V \sim
1	4 168 13	48 V \equiv
1	4 168 14	110 V \sim
1	4 168 16	230 V \sim
1	4 168 19	400 V \sim
		2 NO + 2 NC
1	4 168 20	24 V \sim
1	4 168 21	24 V \equiv
1	4 168 22	48 V \sim
1	4 168 23	48 V \equiv
1	4 168 24	110 V \sim
1	4 168 26	230 V \sim
1	4 168 29	400 V \sim

Contactors CTX³

technical characteristics

Environmental conditions

- Storage temperature: -50 °C to +40 °C
- Operating temperature: -5 °C to +40 °C
- Operating altitude: 3000 m
- Protection degree: IP 20
- Shock resistance: open 8 G / closed 10 G
- Vibration resistance (5-300 Hz): open 2 G / closed 4 G

Type 2 coordination with MPCBs MPX³

According to IEC 60947-4-1
Short circuit current I_q = 50 kA Voltage 400/415 V~ 50/60 Hz

Standard motors AC-3 at 400/415 V 1500 rpm		Manual motor starter				Contactor	
Rated Power (kW)	Current (A)	MPCB type		Thermal overload release setting range (A)	Magnetic release response current (A)	Contactor	
		Type	Rating (A)			Type	Rating (A)
-	-	MPX ³ 32S	0.16	0.1 - 0.16	2.08	CTX ³ 22	9
0.06	0.20	MPX ³ 32S	0.25	0.16 - 0.25	3.25	CTX ³ 22	9
0.09	0.30	MPX ³ 32S	0.40	0.25 - 0.4	5.2	CTX ³ 22	9
0.12	0.40	MPX ³ 32S	0.63	0.4 - 0.63	8.19	CTX ³ 22	9
0.18	0.60	MPX ³ 32S	0.63	0.4 - 0.63	8.19	CTX ³ 22	9
0.25	0.80	MPX ³ 32S	1	0.63 - 1	13	CTX ³ 22	9
0.37	1.1	MPX ³ 32S	1.6	1 - 1.6	20.8	CTX ³ 22	9
0.55	1.5	MPX ³ 32S	1.6	1 - 1.6	20.8	CTX ³ 22	9
0.75	1.9	MPX ³ 32S	2.5	1.6 - 2.5	32.5	CTX ³ 22	12
1.1	2.7	MPX ³ 32S	4	2.5 - 4	52	CTX ³ 22	18
1.5	3.6	MPX ³ 32S	4	2.5 - 4	52	CTX ³ 22	18
2.2	5.2	MPX ³ 32S	6	4 - 6	78	CTX ³ 22	18
3	6.8	MPX ³ 32S	8	5 - 8	104	CTX ³ 22	18
4	9	MPX ³ 32S	10	6 - 10	130	CTX ³ 22	18
5.5	11.5	MPX ³ 32H	13	9 - 13	169	CTX ³ 22	22
7.5	15.5	MPX ³ 32H	17	11 - 17	221	CTX ³ 22	22
10	20	MPX ³ 32H	22	14 - 22	286	CTX ³ 40	32
11	22	MPX ³ 32H	25	18 - 26	338	CTX ³ 40	32
15	29	MPX ³ 32H	32	22 - 32	416	CTX ³ 40	32
18.5	35	MPX ³ 63H	40	28 - 40	520	CTX ³ 65	50
22	41	MPX ³ 63H	50	34 - 50	650	CTX ³ 65	50
30	55	MPX ³ 63H	63	45 - 63	819	CTX ³ 65	65
37	67	MPX ³ 100H	75	55 - 75	975	CTX ³ 100	75
-	-	MPX ³ 100H	90	70 - 90	1170	CTX ³ 100	85
45	80	MPX ³ 100H	100	80 - 100	1300	CTX ³ 100	85

Definition type 2 coordination according to IEC 947-4-1:

- The contactor or the starter must not endanger persons or systems in the event of a short-circuit.
- The contactor or the starter must be suitable for further use.
- No damage to the overload relay or other parts may occur with the exception of welding of the contactor or starter contacts provided that these can be easily separated without significant deformation (such as with a screwdriver).

Accessory

Interlock unit, Cat.No 4 168 80

The mechanical interlock unit provides 2NC contacts for use in electrical interlocking of two contactors


Wire kits

Used for making reversing circuit between two contactors

Contactor	Wire kit		Interlock unit	
	Cat.No	Weight	Cat.No	Weight
CTX ³ 22	4 168 82	0.04 kg	4 168 80	0.06 kg
CTX ³ 40	4 168 83	0.05 kg		
CTX ³ 65	4 168 84	0.12 kg		
CTX ³ 100	4 168 85	0.33 kg		
CTX ³ 150	-	-		

Rating of the contacts in the interlocks

Rated operation voltage (V)	600
Rated insulation voltage (V)	600
Rated frequency (Hz)	50/60
Rated thermal current (A)	10
Rated operation current (A) 240 V AC-15	3

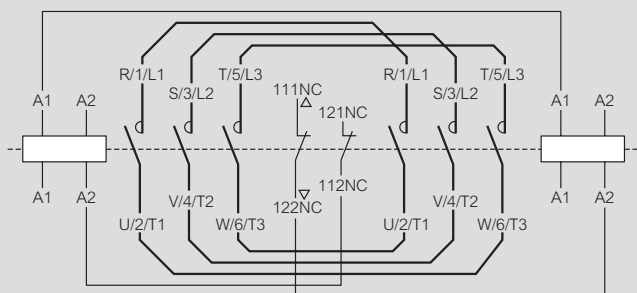

CTX³ 9 A - 150 A typical circuit diagram for reversing contactor

Time delay blocks Cat.Nos 4 168 70/71/72/73

Applying contactors	Cat.No	Rated voltage	Performance
CTX ³ 22 to CTX ³ 150	4 168 70	AC/DC 24 to 48 V	<ul style="list-style-type: none"> • Mounting: Head on • Contact: 1 NC • Time delay: 1s to 30s On delay, Off delay
	4 168 71	AC 110 to 230 V	
	4 168 72	AC/DC 24 to 48 V	<ul style="list-style-type: none"> • Frequency: AC 50/60 hz • Operation: Min. voltage 85% Max. voltage 110% • Accuracy of setting time: ± 20 %
	4 168 73	AC 110 to 230 V	

■ CTX³ capacitor switching units Cat.Nos 4 168 74/75/76/77

Capacitor unit is connected to the terminals of the contactor to reduce the high inrush current.
IEC 60947-4-1 AC 6b

Type	Contactor		Maximum operating power (kvar)			Max. Peak current (A)
			220 - 240 V	400 - 440 V	500 - 550 V	
4 168 74	CTX ³ 22	9 A	5	9.7	14	560
	CTX ³ 22	12 A	6.7	12.5	18	560
	CTX ³ 22	18 A	8.5	16.7	24	850
	CTX ³ 22	22 A	10	18	26	1250
	CTX ³ 40	32 A	15	25	36	1900
4 168 75/76	CTX ³ 40	40 A	20	33.3	48	2160
	CTX ³ 65	50 A	20	40	58	2160
4 168 76/77	CTX ³ 65	65 A	25	45.7	66	3040
	CTX ³ 100	75 A	29.7	54	78	3040
	CTX ³ 100	85 A	35	60	92	3040
	CTX ³ 100	100 A	37	62	94	3040

Note: - When the switch is closed capacitor must be discharged before recharged. (Maximum residual voltage at terminals ≤ 50 V)
- To prevent short current, gG type fuse must be 1.5 - 2 times than rated current

Features of capacitor unit (Pre-loading resistor)

- Damping resistor that can limit the inrush current up to $60 \times I_n$ by closing earlier than the main contacts of the contactor
- No heat loss by the serial resistor
- Eliminates the switching surge
- Improves the performance of the capacitor system

Operation sequence

Capacitor unit: OFF
Contactor: OFF




Fig.1

Capacitor unit: ON
Contactor: OFF




Fig.2

Capacitor unit: OFF
Contactor: ON





Fig.3


Note - Closing sequence: Fig.1 => Fig.2 => Fig.3
Opening sequence: Fig.3 => Fig.1

Overall dimensions of contactors equipped with CTX³ switching units


Cat.No 4 168 74 on CTX³ 22

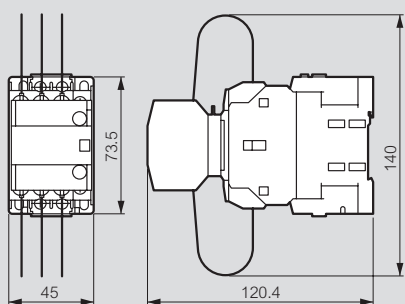


Cat.No 4 168 75/76 on CTX³ 65

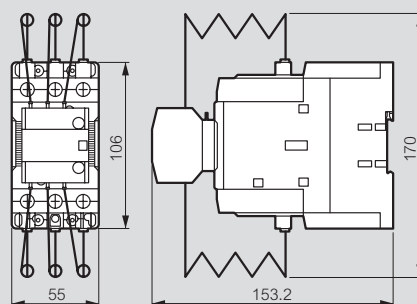

Cat.No 4 168 74 on CTX³ 40

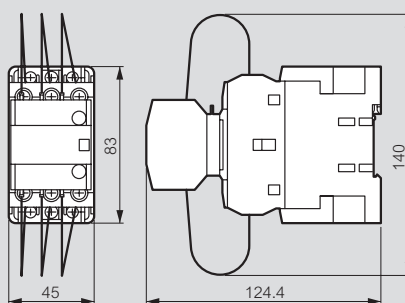




Cat.No 4 168 76/77 on CTX³ 100

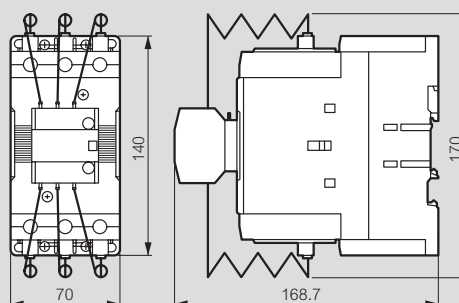




3-pole contactors CTX³

dimensions




CTX³ 22






CTX³ 40

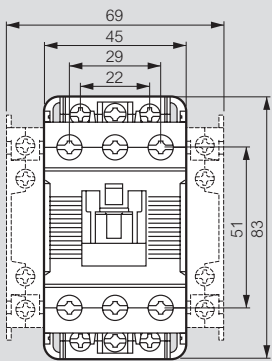


CTX³ 65

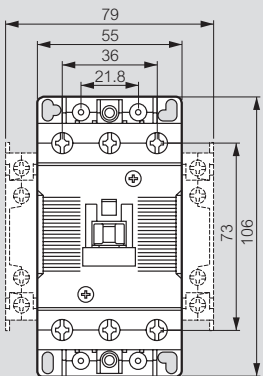


CTX³ 100

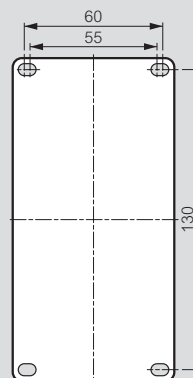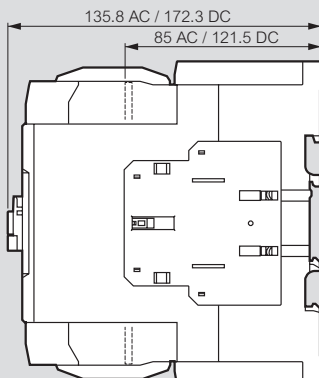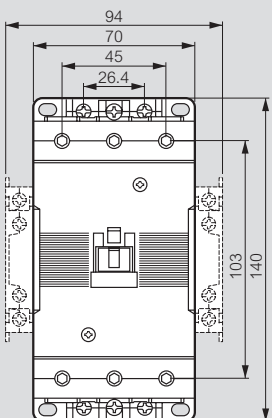


■ CTX³ 150

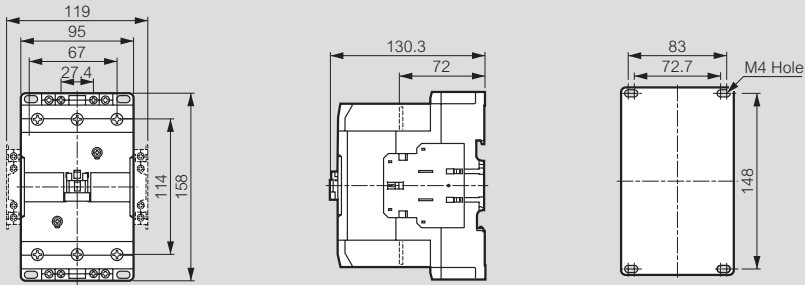


■ CTX³ 225

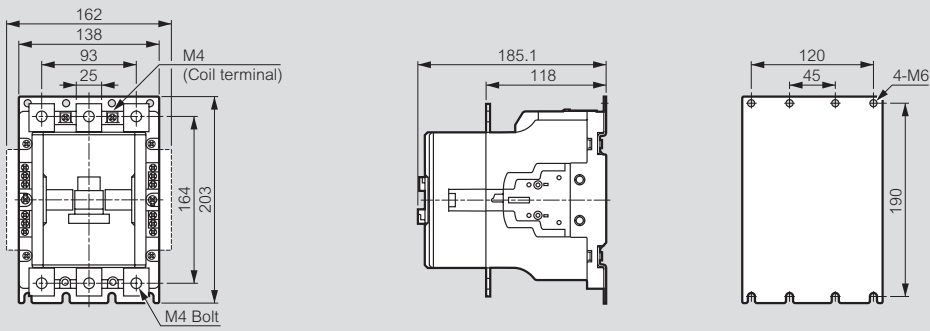

■ CTX³ 400

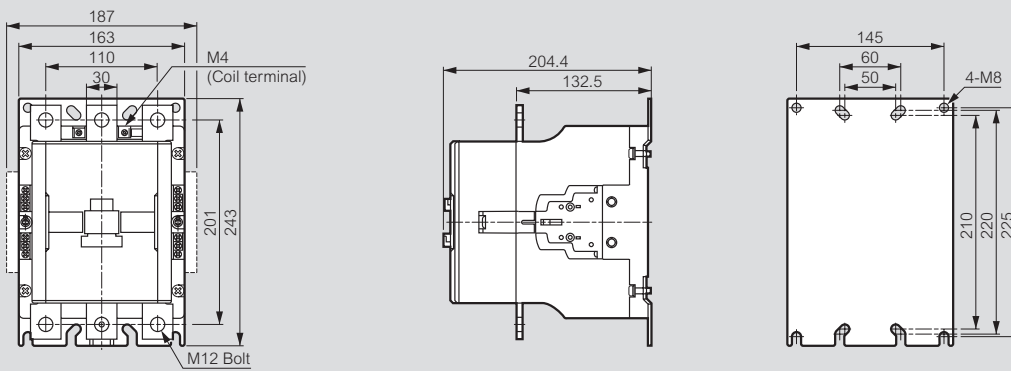


■ CTX³ 800

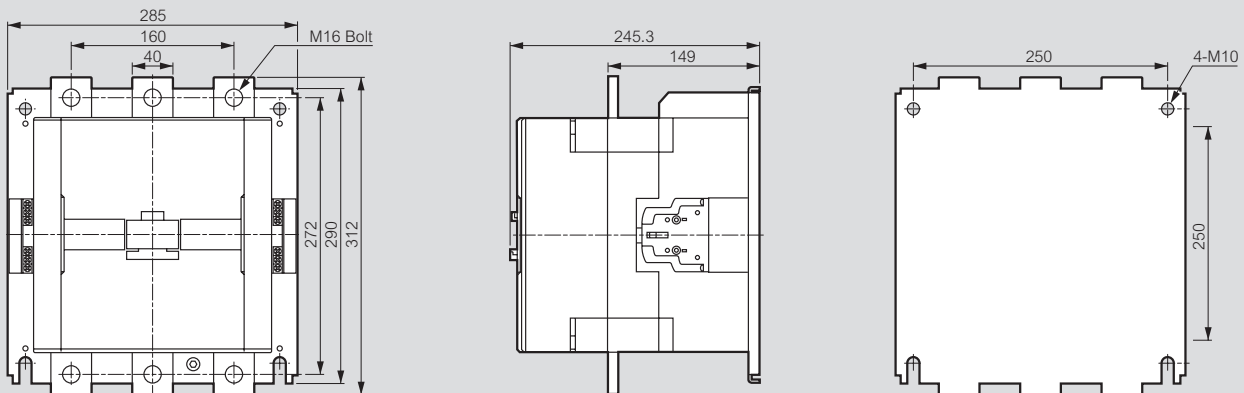


Thermal relays RTX³ - screw type terminals and cage terminals

dimensions


RTX³ 40

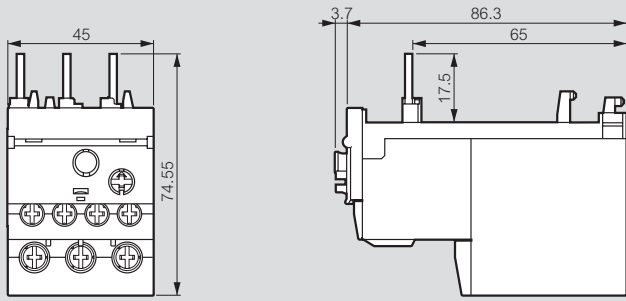


RTX³ 65

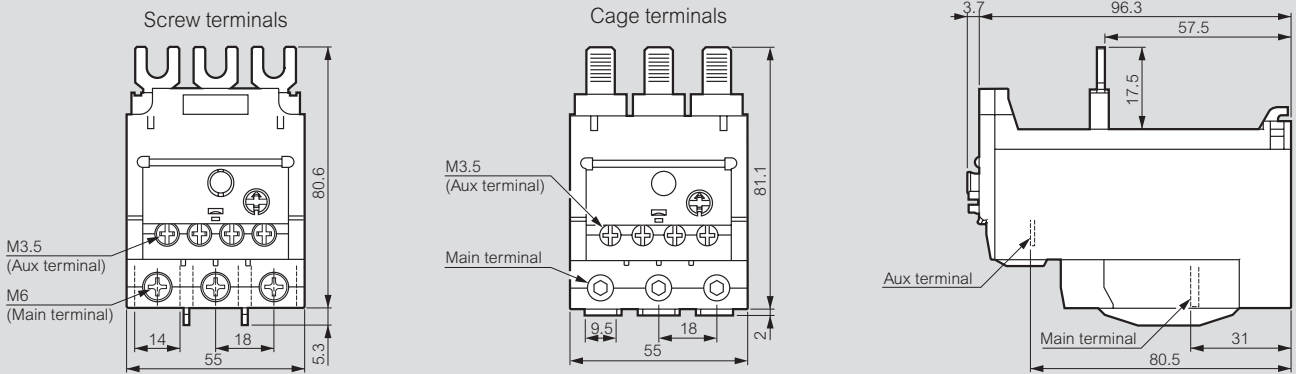



RTX³ 100

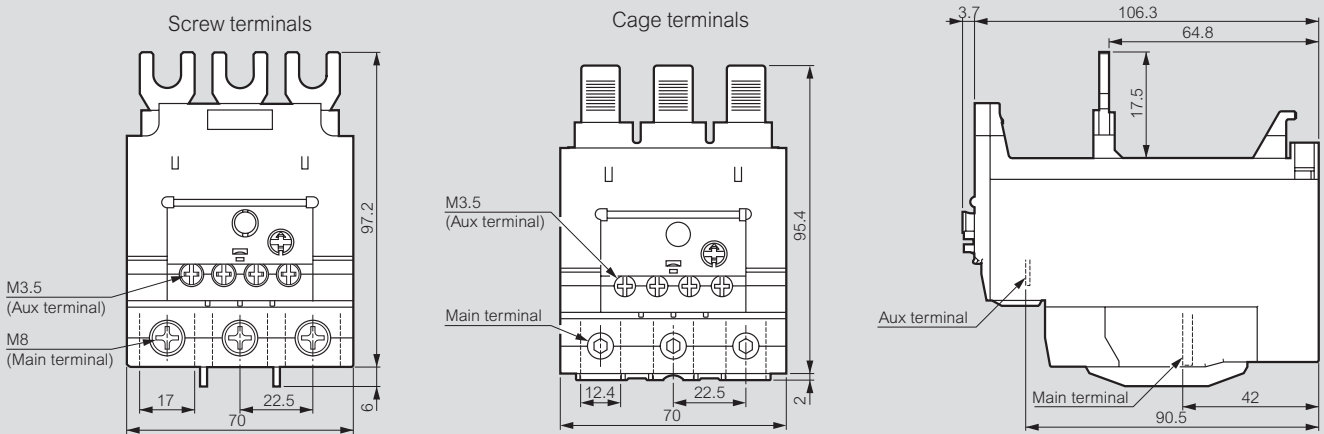



RTX³ 150

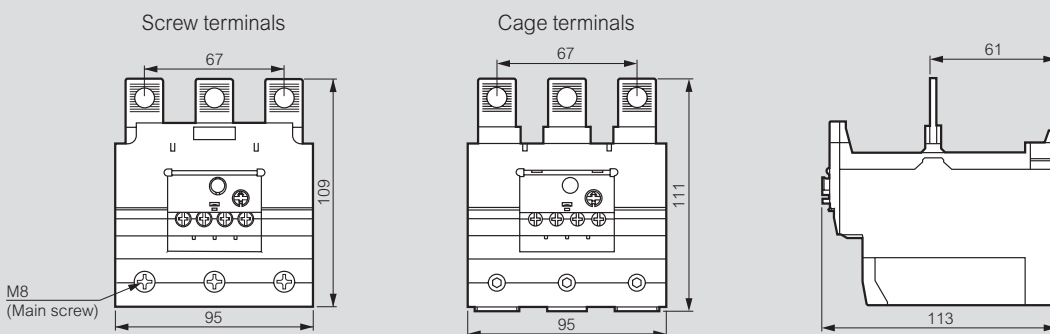



■ RTX³ 225



■ RTX³ 400

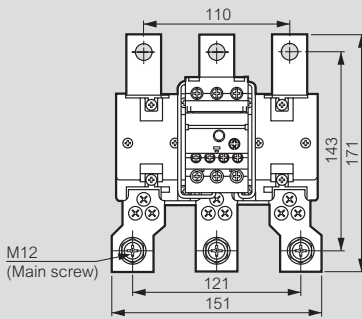


■ RTX³ 800

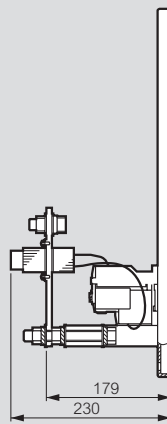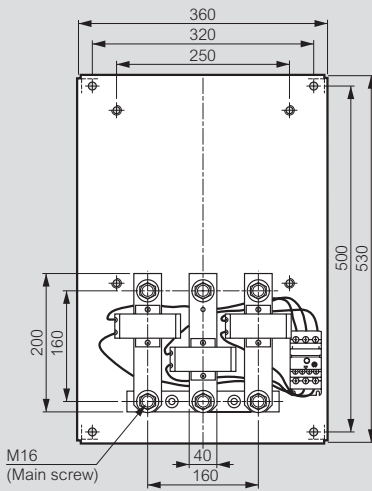


4-pole contactors CTX³

dimensions


■ CTX³ 4P 40 A

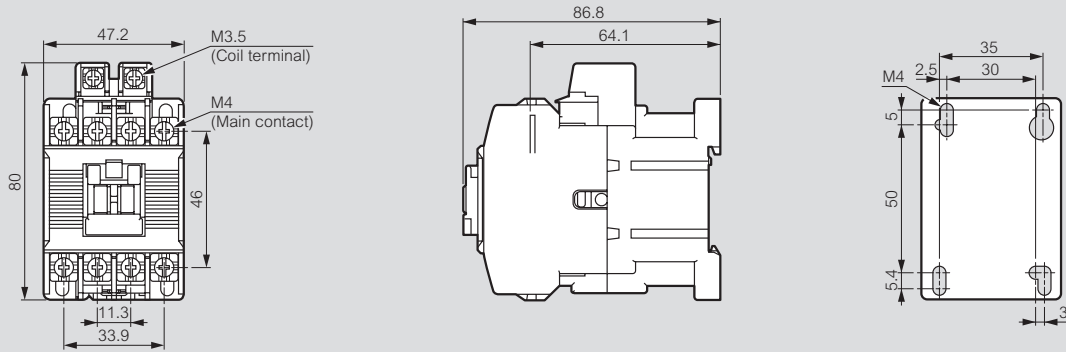


■ CTX³ 4P 60 A

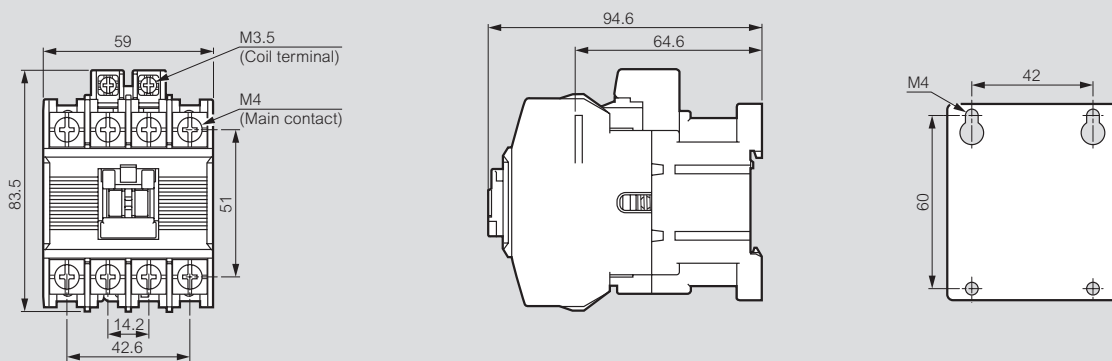




■ CTX³ 4P 100 A and 135 A

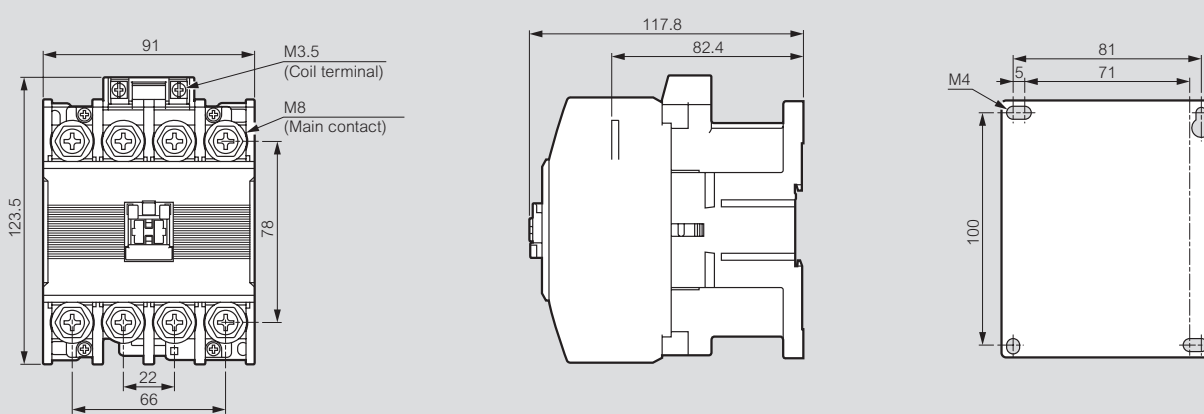




■ CTX³ 4P 165 A, 250 A and 330 A

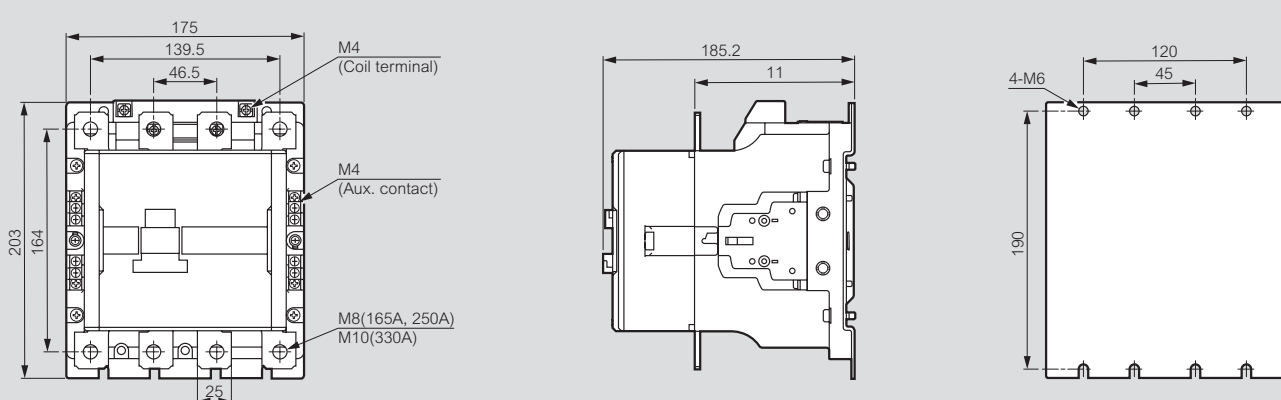

CTX³ 4P 420 A and 500 A

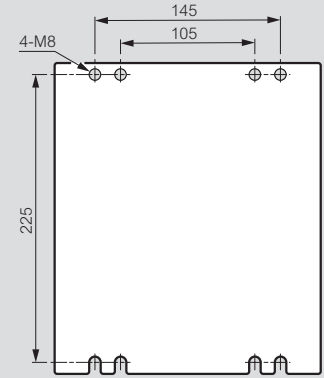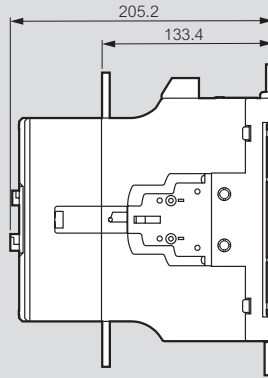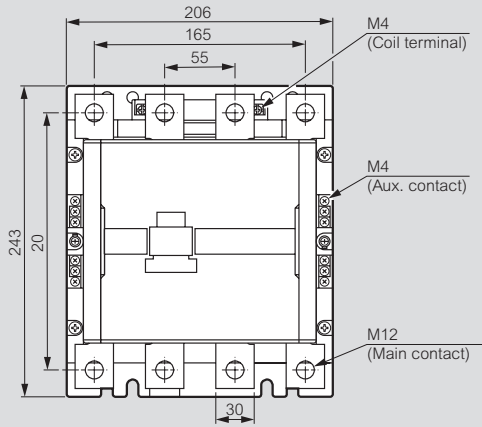



CTX³ 4P 750 A and 900 A

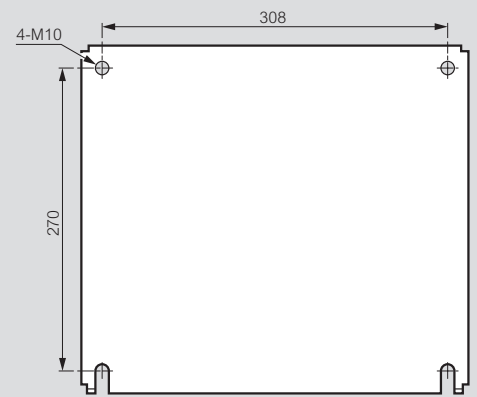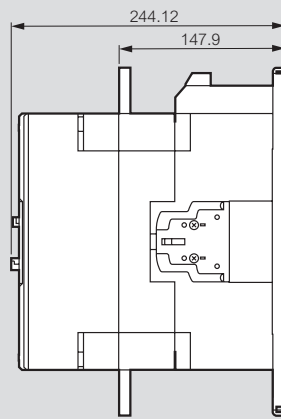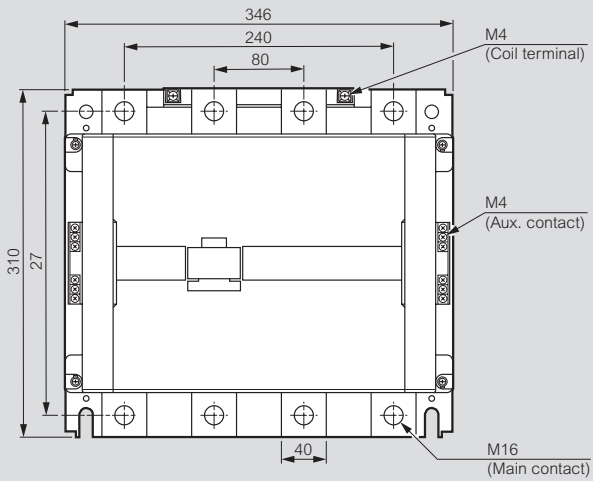



Thermal relays RTX³

tripping curves

RTX³ 40 - class 10A

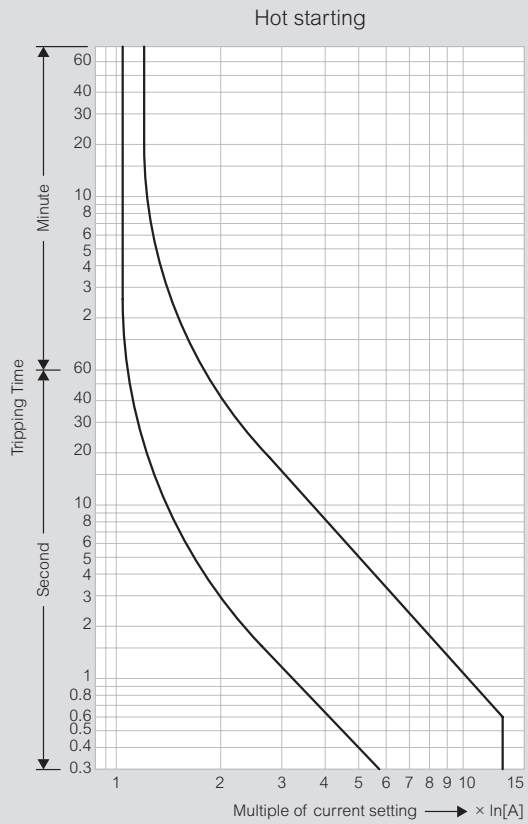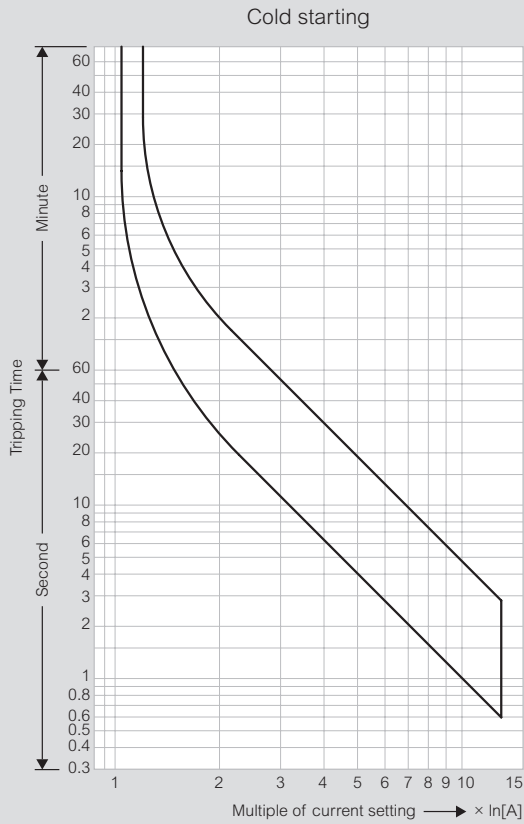


RTX³ 65 - class 10A

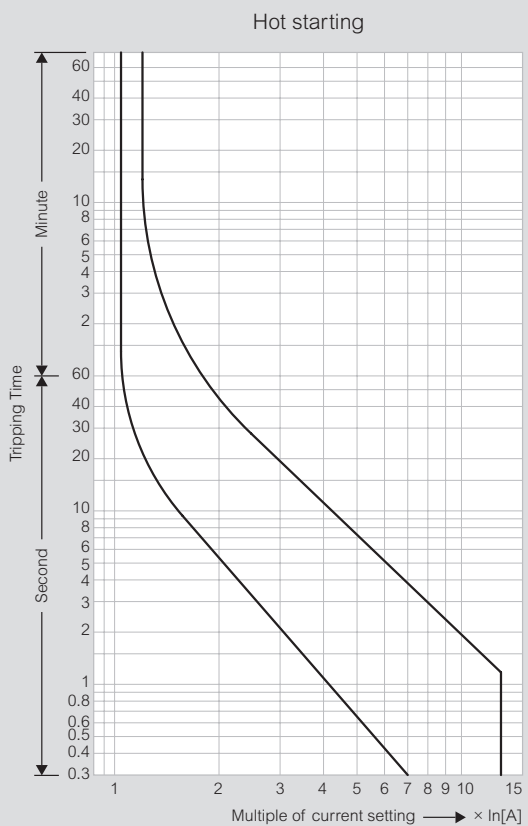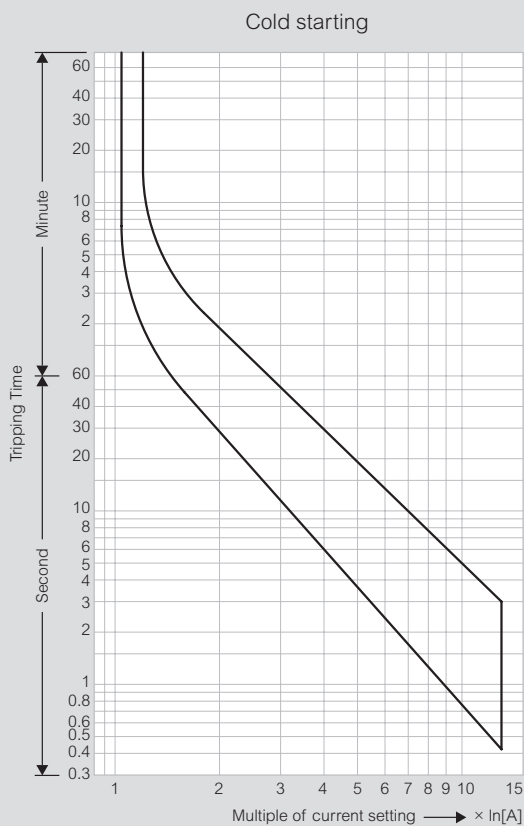


RTX³ 100 - class 10A

Cold starting

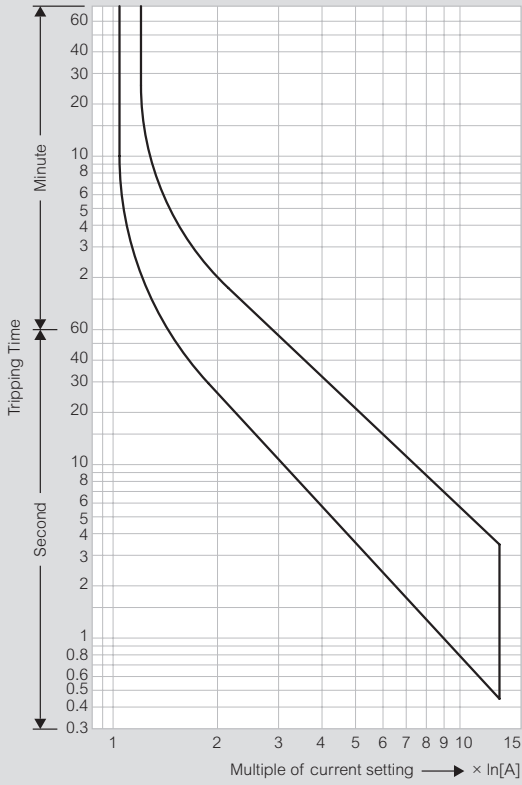


Hot starting

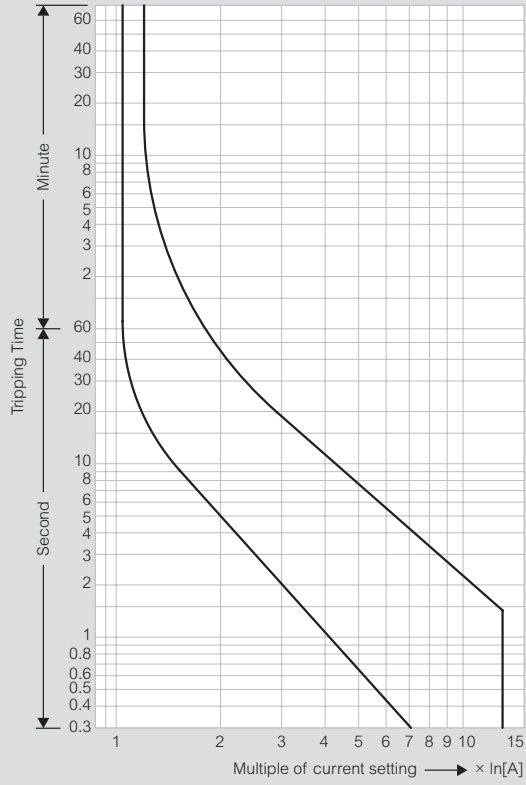


RTX³ 150 - class 10A

Cold starting

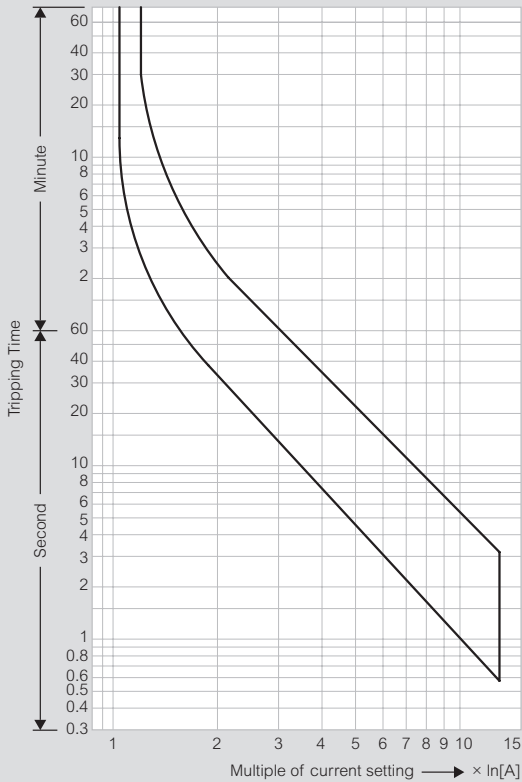

Hot starting

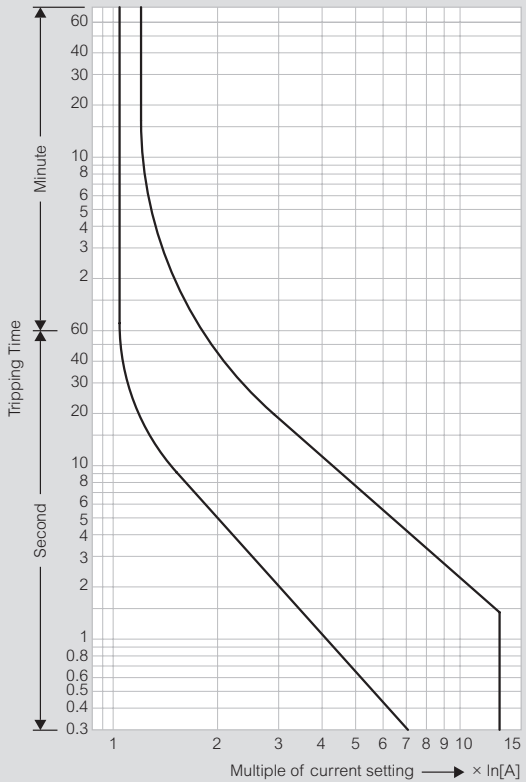


Thermal relays RTX³


tripping curves (continued)

RTX³ 225 - class 10A

Cold starting

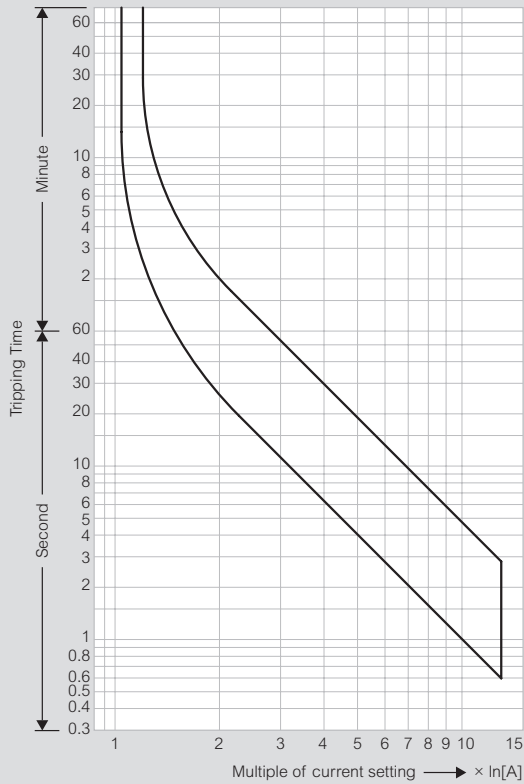


Hot starting

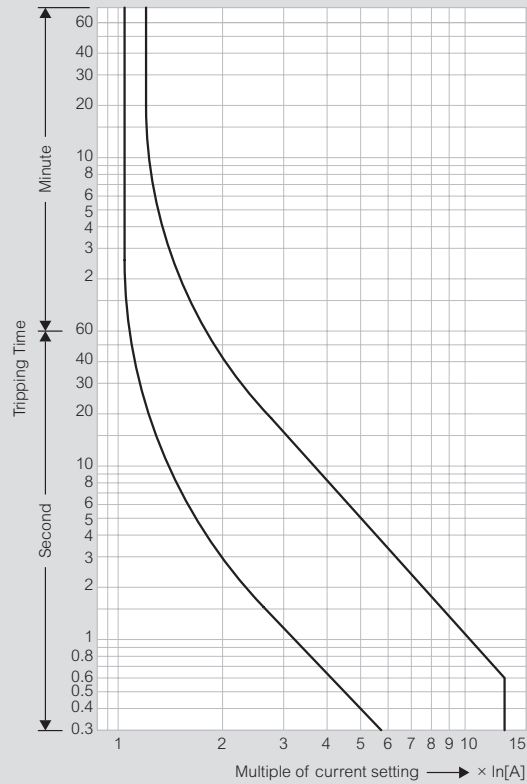


RTX³ 400 - class 10A

Cold starting

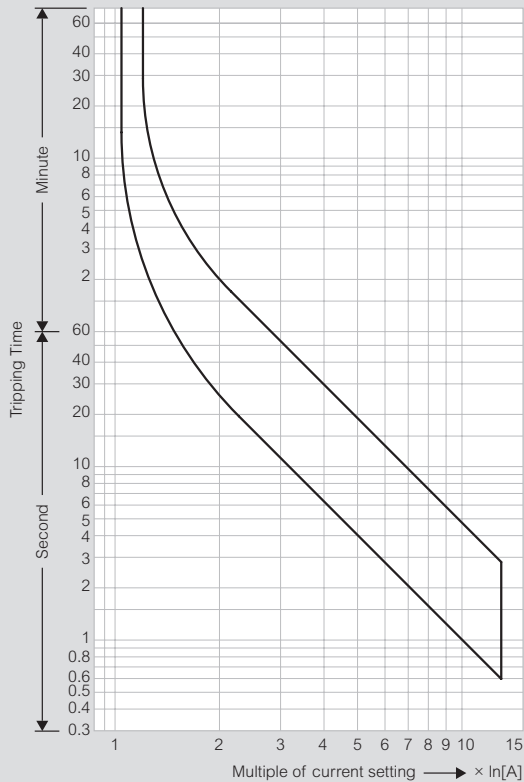


Hot starting

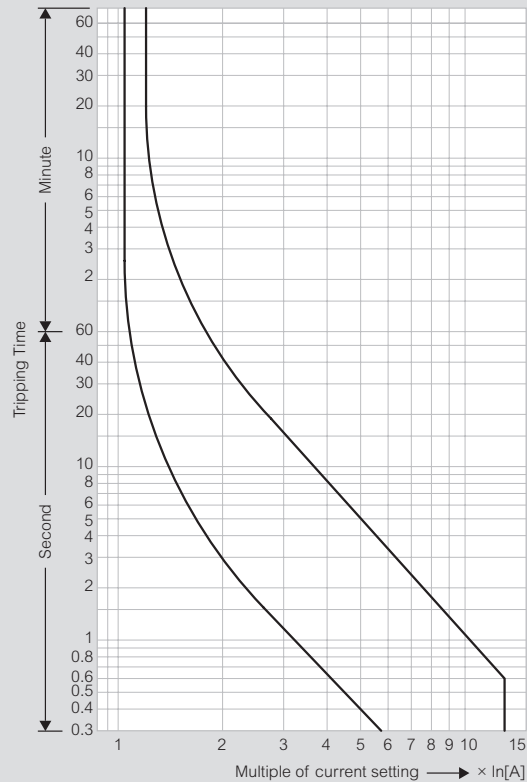


RTX³ 800 - class 10A

Cold starting

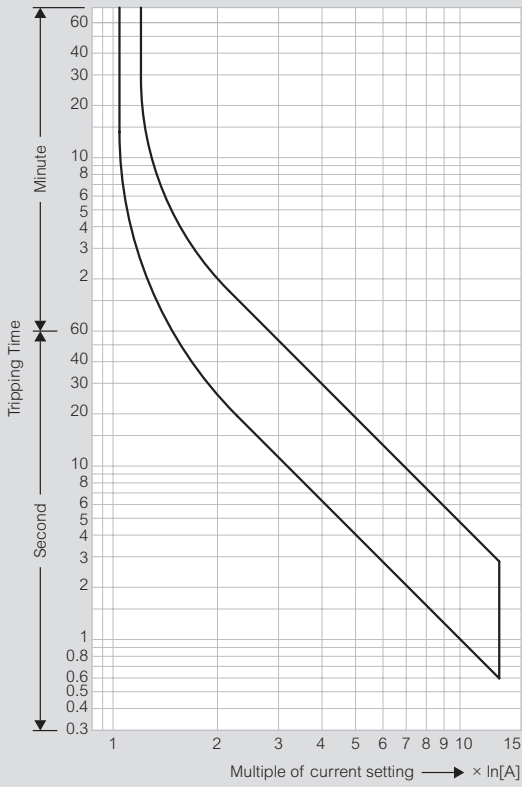


Hot starting

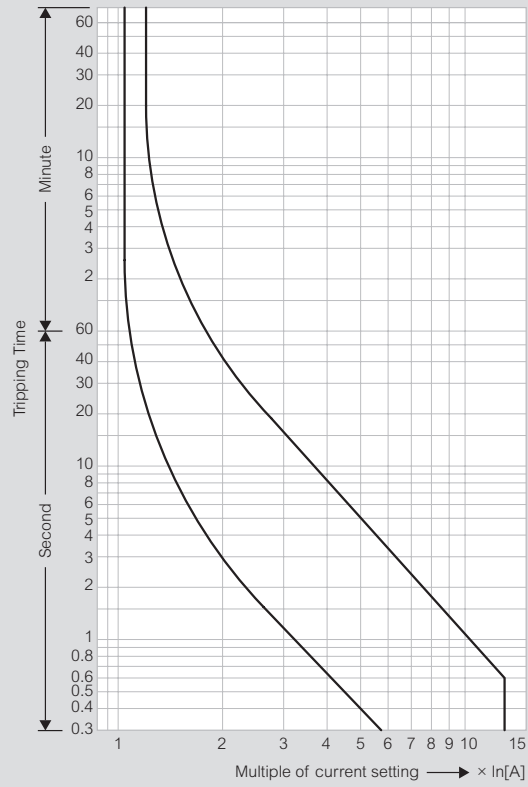


RTX³ mini - class 10A (thermal relays for CTX3 mini contactors)

Cold starting

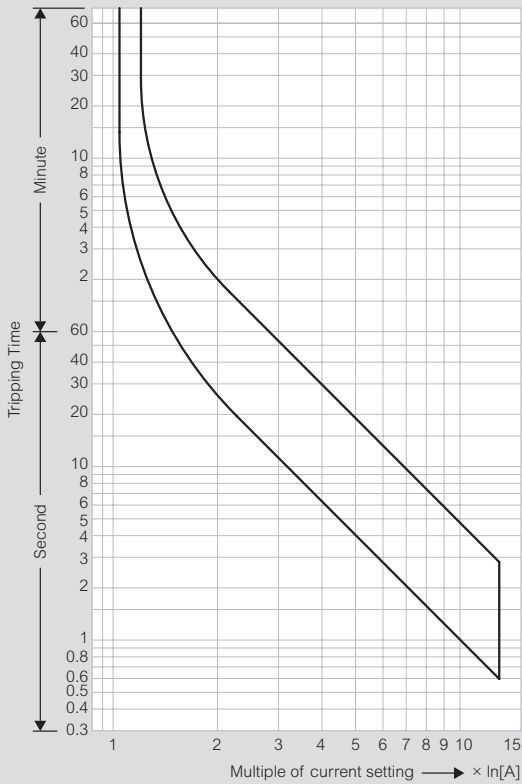

Hot starting

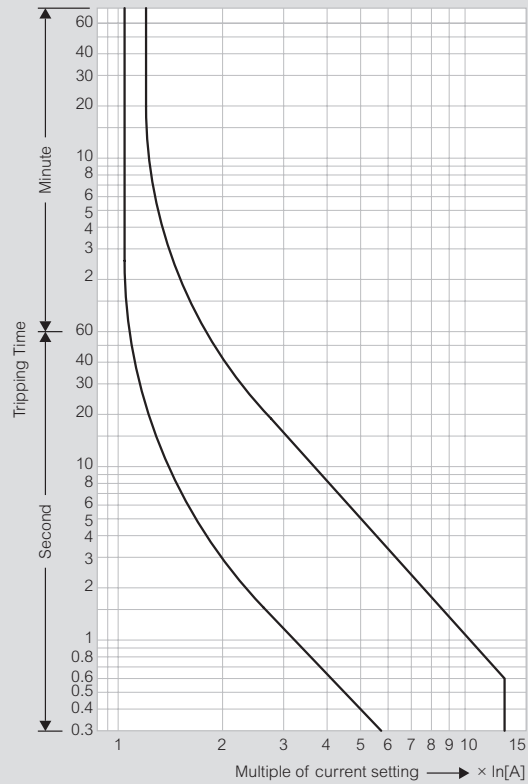


CTX³ accessories


dimensions and wiring diagrams

Auxiliary contacts for CTX³


Front mounting

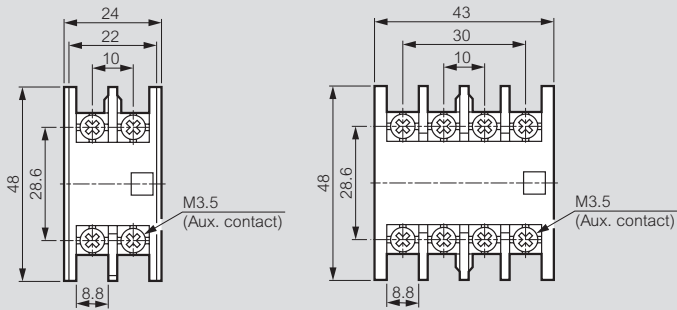


Side mounting

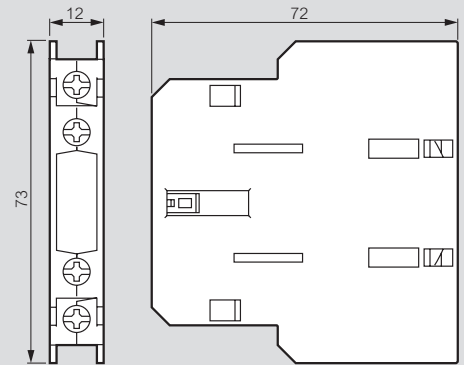


CTX³ time-delay blocks

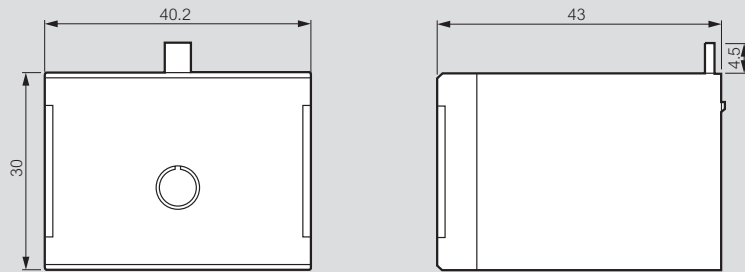


ON delay - Cat.Nos 4 168 70/71

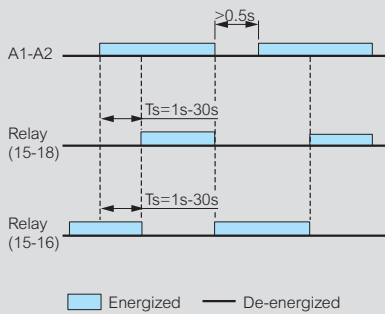


Circuit diagram



OFF delay - Cat.Nos 4 168 72/73

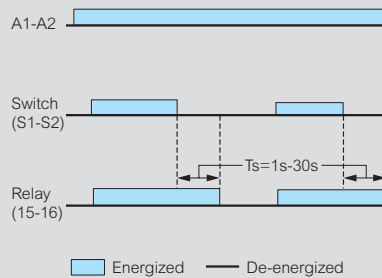

Circuit diagram




Possible combinations of auxiliary blocks per contactor


Auxiliary contact block	Size	Maximum number of blocks		
		Side mounting (1contact)	Front mounting (2 contacts)	Front mounting (4 contacts)
3-pole CTX ³	9 - 22 A	1	0	1
		1	1	0
		2	0	0
	32 - 150 A	4	0	0
		2	1	0
4-pole CTX ³	40 - 135 A	2	0	1
		4	0	0
	165 - 900 A	2	0	1
		4	0	0

Boxes for motor starters


Without pushbuttons - Cat.No 4 168 90

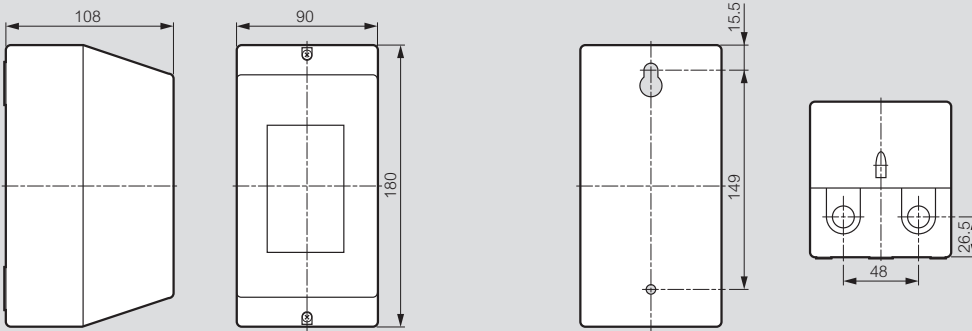

With pushbuttons - Cat.No 4 168 91

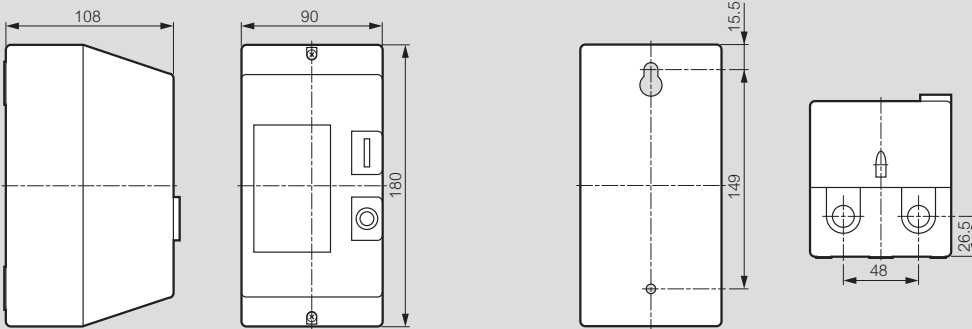

Wiring diagram - Cat.No 4 168 90

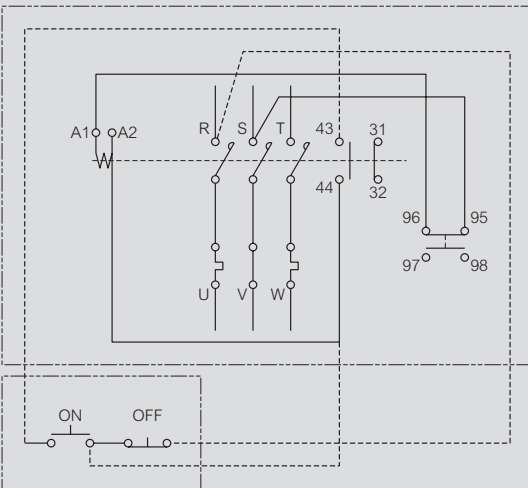

Wiring diagram - Cat.No 4 168 91

